


MAGNETO TRACK

MAGNETO Track with end caps. 48v.
Suitable for surface, suspended or Recessed mounting applications.

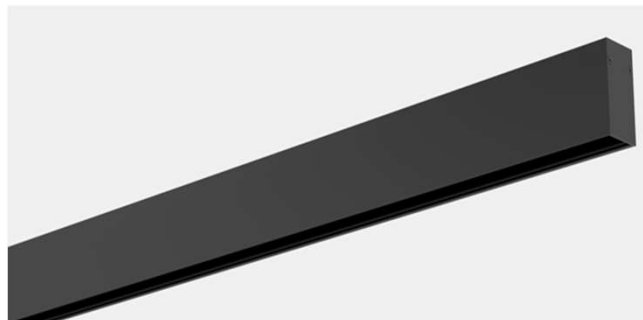

Luminous Flux	Not Applicable
UGR	Not Applicable
Colour Temperature CCT	Not Applicable
Power Consumption	Not Applicable
CRI	Not Applicable
Efficacy	Not Applicable
Dimming	Standard HF – DALI
Finish	White – Black
Installation	Surface, Suspended, Recessed
Dimensions	1000m, 2000mm, 3000mm
Cut-out Dimensions	N/A
Ingress Protection	IP20
Operating Temperature	-25°C ~50°C
Conformity	Thermal management System No UV or IR Emissions
Warranty	5 Years

DIMENSIONS



PREFIX	CCT	DRIVER	FINISH	EMERGENCY	CASAMBI
MAGTRACK/1		HF /	WH /		
MAGTRACK/2		DALI /	BLK		
MAGTRACK/3					

