

FEATURES

The EDGE+ provides a compact and secure lighting solution for safe room applications.

It is vandal resistant and tested to BSEN60529:1992 and A2: 2013. On correct installation the EDGE+ luminaire can attain anti-ligature status, tested to the requirement of the National Offenders Management Services.



- Mounting brackets supplied as standard
- Module made from 1.0 mm mild steel
- Vandal resistant, security screws
- Colour temperature choice
- Night light function
- Compact driver, dimming and emergency options
- 5mm polycarbonate diffuser
- IP65
- IK10



SPECIFICATION

Luminous Flux	3240 Lumens
Colour Temperature CCT	4000K
Power Consumption	27W
Efficacy	120 lm/W
Dimming	Fixed Output SwitchDIM DALI
Lifetime	50,000hrs
Finish	Silver
Installation	Recessed
Dimensions	L 640mm x W 640mm x D 91mm
Emergency	Standard Integral Emergency
Ingress Protection	IP65
Impact Rating	IK10
Operating Temperature	-25°C ~ 50°C
Conformity	BSEN60529:1992 - A2: 2013 Thermal Management System No UV or IR Emissions
Warranty	5 Years

DIMENSIONS

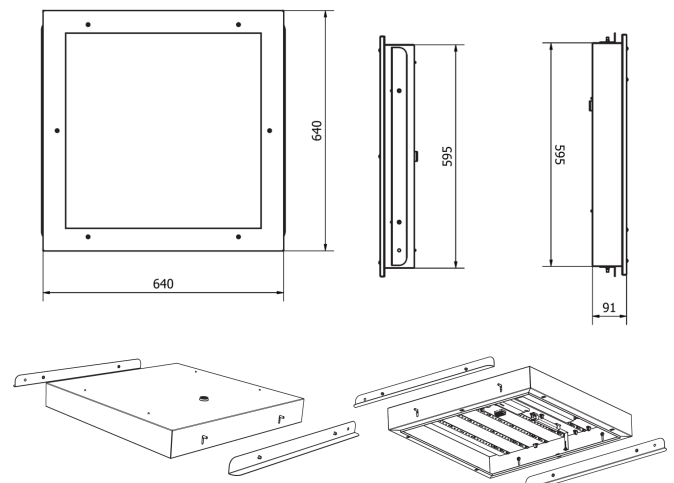

PRODUCT ORDER CODE

CODE	DIMENSIONS	WATTAGE	CCT	CURRENT	LUMINAIR LUMENS	LM/W
EDGE+/640/27W/4K	640 X 640 mm	27W	4000K	5A 37µs	3240	120

ADDITIONAL OPTIONS	ST	Standard integral emergency
	WL	Wireless Control System
	3K	3000K colour temperature
	5K	5000K colour temperature
	SW	SwitchDim
	DALI	DALI dimming

