

## FEATURES

The ENVER is developed to offer maximum flexibility with a focus on low glare UGR to aid LG7 compliance. The tunable white options and wireless connectivity makes the ENVER a perfect luminaire for office, commercial and educational applications.



- Efficacy up to 110 lm/W
- Central microprism diffuser
- Low glare
- UGR19 compliant
- CRI80
- 3-Step MacAdam
- IP44



## SPECIFICATION

Luminous Flux	2974 - 5106 Lumens
UGR	<19
Colour Temperature CCT	3000K   4000K   TW
Power Consumption	32W   46W
CRI	>80
Efficacy	93 - 110 lm/W
Dimming	Fixed Output   1-10V   DALI
Operating Voltage	220 – 240V
Operating Frequency	50-60Hz
Lifetime	100,000hrs
Finish	White
Installation	Recessed
Dimensions	W 589 x L 583 x D 100mm
Ingress Protection	IP44 (front) IP20 (back module)
Weight	3.9 kg
Operating Temperature	-25°C ~35°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

## DIMENSIONS

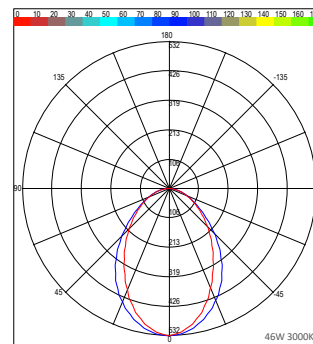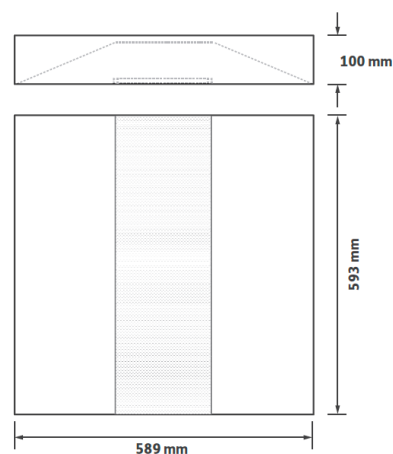

**PRODUCT ORDER CODE**

EXAMPLE: ENVER/46/4K/DALI/WH/ST

PREFIX	WATTAGE	CCT	DRIVER	FINISH	EMERGENCY	CASAMBI
ENVER	32W	<b>3K</b> 3000K	<b>FO</b> fixed output	<b>WH</b> white	<b>ST</b> standard emergency	<b>CAS</b> casambi
	46W	<b>4K</b> 4000K	<b>10</b> 1-10V		<b>DEM</b> dali emergency	
		<b>TW</b> tunable white	<b>DALI</b> DALI dimming			