

FEATURES

The IRIS is a stylish contemporary IP65 / IK10 LED surface mounted bulkhead. It is suitable for wall or ceiling mounting and ideal for use in stairwells, corridors and store rooms.



- Efficacy up to 103 - 114 lm/W
- Twist and lock bezel to conceal fixings
- CRI80
- IP65 sealed against liquid and dust ingress
- IK10 impact tested to BSEN2262
- Motion sensors available - on/off or on/10% dim
- Emergency, wireless network and dimming options



SPECIFICATION

Luminous Flux	1150 - 1675 Lumens
Colour Temperature CCT	3000K 4000K
Power Consumption	11W 15W
CRI	>80
Efficacy	103 - 114 lm/W
Dimming	Fixed Output SwitchDim DALI
Operating Voltage	220 – 240V
Lifetime	47,000hrs
Finish	White Black
Material	Polycarbonate
Installation	Surface
Dimensions	∅ 380 mm x 122 mm
Ingress Protection	IP65
Operating Temperature	-25°C ~35°C
Weight	1.7 kg
Sensor Options	Integral Motion Sensor (on/off) Integral Motion Sensor (on/10% dim)
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

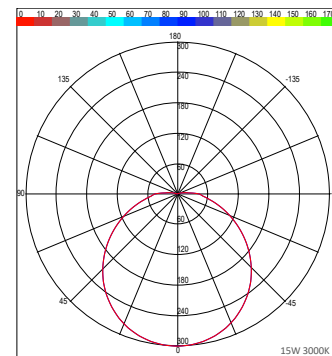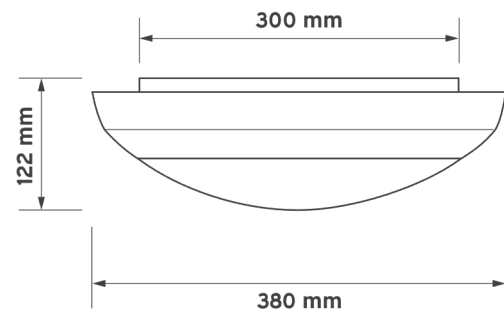

PRODUCT ORDER CODE

EXAMPLE: IRIS/15W/3K/SW/WH/ST

PREFIX	WATTAGE	CCT	DRIVER	FINISH	EMERGENCY	CASAMBI	SENSOR
--------	---------	-----	--------	--------	-----------	---------	--------

IRIS	11W	3K 3000K	FO fixed output	WH white	ST standard emergency	CAS casambi	SO on/off
	15W	4K 4000K	SW switchdim	BL black	DEM dali emergency		SD on/10% dim
			DALI DALI dimming				