

### FEATURES

The KIRAN is a lightweight high-performance suspended pendant. It features a range of finish options and accessories, making it an excellent choice for interior lighting applications.



- Efficacy up to 106 lm/W
- 60° satin reflector as standard
- Alternative reflector options available
- Choice of paint finish options
- UGR compliant
- CRI80
- IP20



### SPECIFICATION

Luminous Flux	975 - 2650 Lumens
UGR	<19
Colour Temperature CCT	3000K   4000K
Power Consumption	10W   18W   27W
CRI	>80
Efficacy	106 lm/W
Dimming	Fixed Output   1-10V   DALI
Operating Voltage	220 – 240V
Operating Frequency	50-60Hz
Lifetime	50,000hrs
Finish	White   Grey   Black
Installation	Pendant – 2m Suspension Kit
Dimensions	∅ 203 mm x 152 mm
Material	Aluminium housing
Ingress Protection	IP20
Operating Temperature	-25°C ~35°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

### DIMENSIONS

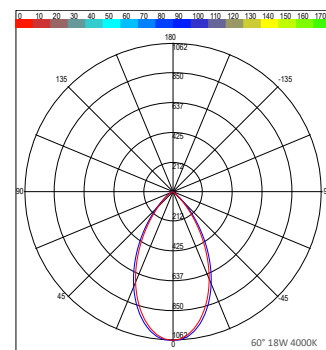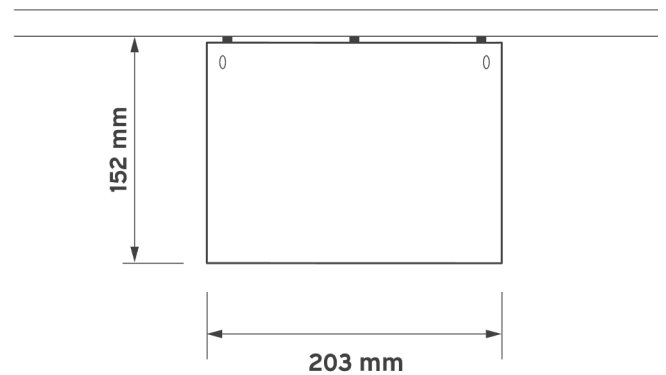

### PRODUCT ORDER CODE

EXAMPLE: KIRAN-P

PREFIX	WATTAGE	CCT	REFLECTOR	DRIVER	FINISH	CASAMBI
KIRAN-P	10W	3K 3000K	60 60° satin as standard	FO fixed output	WH white	CAS casambi
	18W	4K 4000K	50 50° multifaceted	10 1-10V	GR grey RAL9006	
	27W		40 40° specular	DALI DALI dimming	BL black RAL 9015	