

FEATURES

NURI MIDI is a high-performance mid-sized LED downlight. It features a specular reflector and low glare ideal for indoor lighting applications.


- Efficacy up to 109 lm/W
- Specular reflector as standard
- Aluminium housing
- Low-glare
- UGR compliant
- CRI90
- IP20



SPECIFICATION

| | |
|------------------------|--|
| Luminous Flux | 625 - 1925 Lumens |
| UGR | <19 |
| Colour Temperature CCT | 3000K 4000K |
| Power Consumption | 6W 12W 18W |
| CRI | >90 |
| Efficacy | 100 - 109 lm/W |
| Dimming | Fixed Output SwitchDim DALI |
| Operating Voltage | 220 – 240V |
| Lifetime | 50,000hrs |
| Finish | White |
| Installation | Recessed |
| Dimensions | ∅ 130 mm x 99 mm |
| Cut-out Dimensions | ∅ 110 mm |
| Ingress Protection | IP20 |
| Operating Temperature | -25°C ~35°C |
| Conformity | Thermal Management System No UV or IR Emissions |
| Warranty | 5 Years |

DIMENSIONS

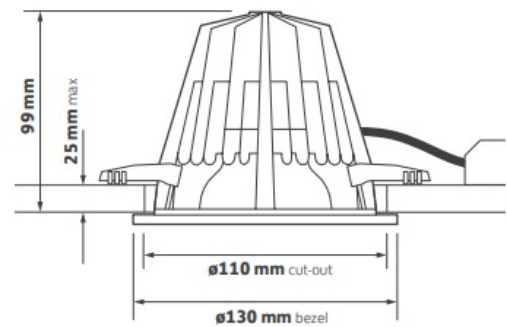

PRODUCT ORDER CODE

EXAMPLE: NURI-M/12W/4K/FO/BWH/ST

| PREFIX | WATTS | CCT | DRIVER | FINISH | EMERGENCY | CASAMBI |
|--------|-------|-------------|----------------------|-----------------------|--------------------------|----------------|
| NURI-M | 6W | 3K 3000K | FO fixed output | BWH white RAL 9016 | ST standard emergency | CAS casambi |
| | 12W | 4K 4000K | SW switchdim | | DEM dali emergency | |
| | 18W | | DALI DALI dimming | | | |

