

FEATURES

ORAN is a high-performance LED downlight that provides optimal light distribution for interior lighting applications.




- Efficacy up to 147 lm/W
- Colour temperature options
- CRI82
- Clear or diffused glass
- Slim design for easy installations
- Dimming controls
- IP44 (front)
- IP07



SPECIFICATION

Luminous Flux	1422 - 3116 Lumens
Colour Temperature CCT	3000K 4000K 5000K
Power Consumption	11W 17W 24W
CRI	>82
Efficacy	Up to 147 lm/W
Optic	Clear Frosted
Beam Angle	20° 45°
Dimming	Fixed Output 1-10V DALI
Operating Voltage	32.4 – 33.8V
Current	350 mA 500 mA 700 mA
Lifetime	78,000hrs
Finish	White RAL 9003
Installation	Recessed
Dimensions	∅ 145 mm x 66.3 mm
Cut-out Dimensions	∅ 125 mm
Ingress Protection	IP44 (front) IP20 (casing)
Impact Rating	IK07
Weight	420 g
Operating Temperature	-20°C ~45°C
Conformity	Thermal Management System No UV or IR Emissions
Warranty	5 Years

DIMENSIONS

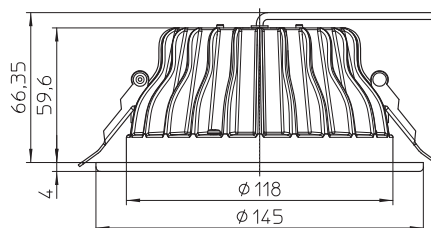

PRODUCT ORDER CODE

EXAMPLE: ORAN4/24W/4K/45D/FO/WH

PREFIX	WATTAGE	CCT	BEAM ANGLE	DRIVER	FINISH	EMERGENCY	CASAMBI
ORAN4	11W	3K 3000K	20 C 20° clear glass	FO fixed output	WH white RAL 9003	ST standard emergency	CAS casambi
	17W	4K 4000K	45 D 45° diffused glass	10 1-10V		DEM dali emergency	
	24W	5K 4000K		DALI DALI dimming			



UK CA IP44 IK07