

### FEATURES

ORAN is a high-performance LED downlight that provides optimal light distribution for interior lighting applications.




- Efficacy up to 135 lm/W
- Colour temperature options
- CRI82
- Clear or diffused glass
- Slim design for easy installations
- Dimming controls
- IP44 (front)
- IP07



### SPECIFICATION

Luminous Flux	2593 - 5727 Lumens
Colour Temperature CCT	3000K   4000K   5000K
Power Consumption	21W   28W   36W   42W
CRI	>82
Efficacy	Up to 135 lm/W
Optic	Clear   Frosted
Beam Angle	70°   90°
Dimming	Fixed Output   1-10V   DALI
Operating Voltage	30 – 40V
Current	Up to 1400mA
Lifetime	78,000hrs
Finish	White RAL 9003
Installation	Recessed
Dimensions	∅ 242 mm x 66.7 mm
Cut-out Dimensions	∅ 210 mm
Ingress Protection	IP44 (front) IP20 (casing)
Impact Rating	IK07
Weight	1100 g
Operating Temperature	-20°C ~45°C
Conformity	Thermal Management System No UV or IR Emissions
Warranty	5 Years

### DIMENSIONS

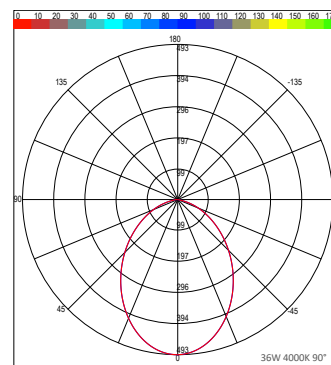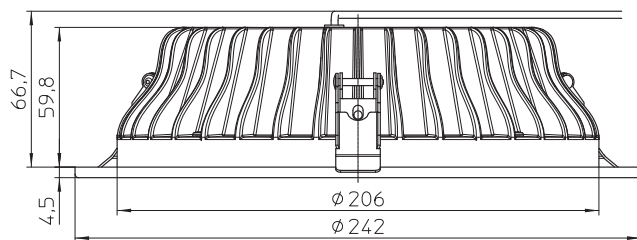

### PRODUCT ORDER CODE

EXAMPLE: ORAN8/28W/4K/90D/WH

PREFIX	WATTAGE	CCT	BEAM ANGLE	DRIVER	FINISH	EMERGENCY	CASAMBI
ORAN8	21W	3K 3000K	70 C 70° clear glass	FO fixed output	WH white RAL 9003	ST standard emergency	CAS casambi
	28W	4K 4000K	90 D 90° diffused glass	10 1-10V		DEM dali emergency	
	36W	5K 4000K		DALI DALI dimming			
	42W						



UK CA IP44 IK07