

FEATURES

The ACTIVE has a steel louvred front with double protection that offers ambient illumination. Its sturdy and uniform design is an ideal solution for indoor sports or gym facilities


- Colour temperature choice
- Efficacy up to 139 lm/W
- Multiple power/sizes available
- Steel louvred front
- Glare reduction
- Compact driver
- Dimming and emergency options
- HS/SON equivalent
- IP20



SPECIFICATION

Luminous Flux	6950 - 21264 Lumens
Colour Temperature CCT	3000K 4000K 5000K
Power Consumption	52W 83W 103W 128W 152W
Efficacy	139 lm/W
Dimming	Fixed Output SwitchDIM DALI
Lifetime	50,000hrs
Finish	White
Installation	Surface
Dimensions – 52W	597 mm x 115 mm x 227 mm
Dimensions – 83W/103W	597 mm x 115 mm x 407 mm
Dimensions – 128W/152W	714 mm x 113 mm x 502 mm
Emergency Option	Standard Integral Emergency
Ingress Protection	IP20
Material	Steel front
Weight	4.8 – 6.1 kg
Operating Temperature	-25°C ~ 50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

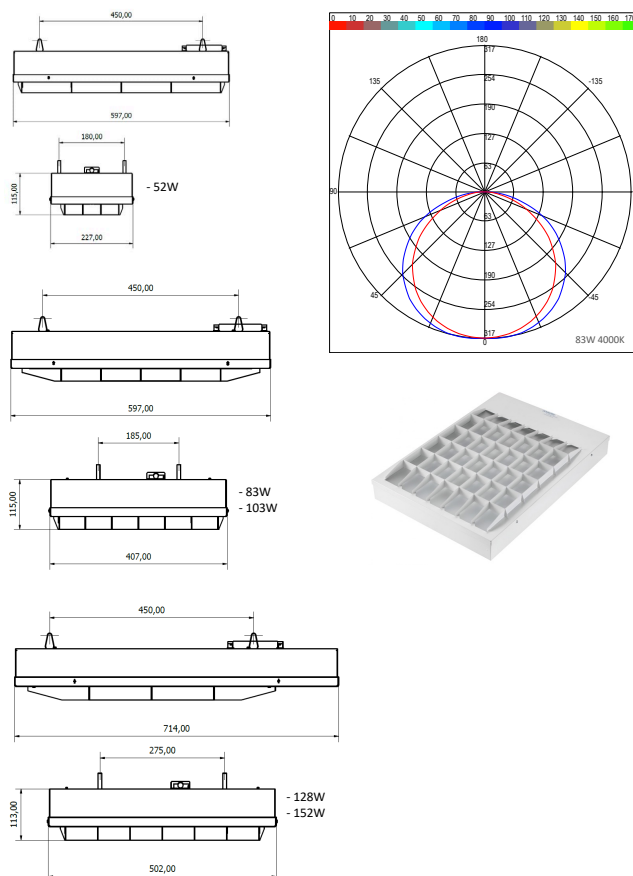

PRODUCT ORDER CODE

CODE	WATTAGE	DIMENSIONS	CCT	WEIGHT	CURRENT	LUMINAIRE LUMENS	REPLACES
ACTIVE/52W/4K	52W	597 mm x 115 mm x 227 mm	4000K	4.8 KG	50A 200µs	6950	150W SON/MH
ACTIVE/83W/4K	83W	597 mm x 115 mm x 407 mm	4000K	5.3 KG	59A 176µs	11611	250W SON/MH
ACTIVE/103W/4K	103W	597 mm x 115 mm x 407 mm	4000K	5.7 KG	59A 176µs	14409	250W /400 SON/MH
ACTIVE/128W/4K	128W	714 mm x 113 mm x 502 mm	4000K	5.8 KG	59A 176µs	17906	400W SON
ACTIVE/152W/4K	152W	714 mm x 113 mm x 502 mm	4000K	6.1 KG	108A 176µs	21264	600W MH

ADDITIONAL OPTIONS		
3K		3000K colour temperature
5K		5000K colour temperature
FO		Fixed Output
SW		SwitchDim
DALI		DALI dimming
ST		Standard integral emergency self-test
CF		Corridor function
MWP		Programmable MW sensor
IP65		IP65 version
S		Surface mounting bracket