

FEATURES

CLESSIDRA is an outdoor wall sconce light with an hourglass silhouette. It is a specially designed wall light uses direct/indirect LED technology for illuminating facades and walls.



- Efficacy up to 47 lm/W
- Direct/indirect illumination
- Die-cast aluminium module
- 4 mm thick tempered glass diffuser
- Corrosion and salt water resistant coating
- CRI80
- IP65, IK07



SPECIFICATION

Luminous Flux	562 Lumens
Colour Temperature CCT	4000K
Power Consumption	12W
CRI	80
Efficacy	47 lm/W
Dimming	Fixed Output 1-10V DALI
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Finish	Grey RAL9007
Installation	Surface Wall
Dimensions	L 243 mm x W 180 mm x H 224 mm
Ingress Protection	IP65
Impact Resistance	IK07
Weight	2.1 kg
Diffuser Material	4mm Tempered Glass
Module Material	Die-cast Aluminium Corrosion/Salt Water Resistant
Operating Temperature	-25°C ~50°C
Conformity	Thermal Management System No UV or IR Emissions, EN60598-1, UKCA, CLASS I
Warranty	5 Years

DIMENSIONS

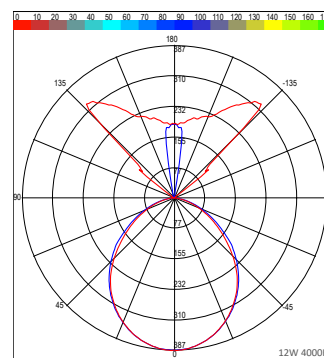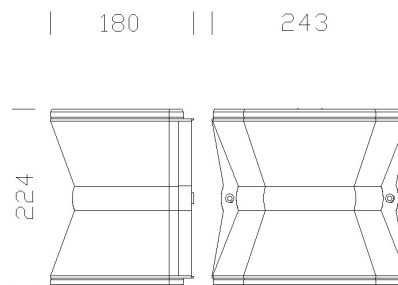

PRODUCT ORDER CODE

EXAMPLE: CLESSIDRA/12W/4K/FO/G

PREFIX	WATTAGE	CCT	DRIVER	FINISH
CLESSIDRA	12W	4K 4000K	FO fixed output 10 1-10V dimming DALI DALI dimming	G grey RAL9007