

FEATURES

The EDGE IP65 provides a high quality lighting solution for clean room applications. Suitable for concealed ceilings and for 15mm/24mm exposed T grid systems.



- Mounting brackets supplied as standard
- Colour temperature choice
- Efficacy up to 124.9 lm/W
- Quick front access to the module
- Compact driver, dimming and emergency options
- T5 equivalent
- IP65
- IK10



SPECIFICATION

Luminous Flux	2497 - 6743 Lumens
Colour Temperature CCT	3000K 4000K 5000K
Power Consumption	20W 27W 54W
Efficacy	124.9 lm/W
Dimming	Fixed Output SwitchDIM DALI
Lifetime	50,000hrs
Finish	White
Installation	Recessed
Dimensions	297 mm 497 mm 597 mm 1197 mm
Depth	88 mm
Emergency	Standard Integral Emergency
Ingress Protection	IP65 (front face only)
Impact Rating	IK10
Weight	4.5 – 9.4 kg
Operating Temperature	-25°C ~ 50°C
Conformity	Thermal Management System No UV or IR Emissions
Warranty	5 Years

DIMENSIONS

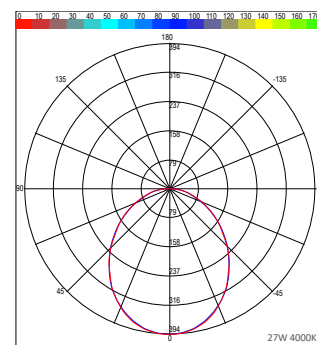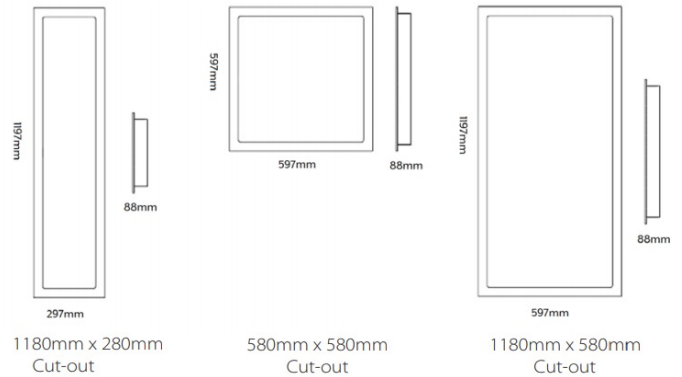

PRODUCT ORDER CODE

CODE	DIMENSIONS	WATTAGE	CCT	WEIGHT	CURRENT	BOARD LUMENS	LUMINAIR LUMENS	LM/W	REPLACES
EDGE IP65/497/20W/4K	497 X 487 mm	20W	4000K	4.5 KG	5A 37µs	3469	2497	124.9	2 X 36W PL
EDGE IP65/597/20W/4K	597 X 597 mm	20W	4000K	5.4 KG	5A 37µs	3469	2497	124.9	4 X 14W T5
EDGE IP65/597/27W/4K	597 X 597 mm	27W	4000K	5.4 KG	5A 37µs	4683	3371	124.9	4 X 24W T5
EDGE IP65/1197/20W/4K	1197 X 297 mm	20W	4000K	5.4 KG	5A 37µs	4683	3371	124.9	2 X 28W T5
EDGE IP65/1197/27W/4K	1197 X 297 mm	27W	4000K	5.4 KG	5A 37µs	6937	4995	124.9	2 X 28W T5
EDGE IP65/1197/54W/4K	1197 X 597 mm	54W	4000K	9.4 KG	12A 50µs	9365	6743	124.9	4 X 54W T5

ADDITIONAL OPTIONS

ST	Standard integral emergency
CF	Corridor function
MWP	Remote Programmable Microwave
WL	Wireless Control System
3K	3000K colour temperature
5K	5000K colour temperature
SW	SwitchDim
DALI	DALI dimming



UK IP65 IK10