

## FEATURES

The ERGUN is a tough IP65 / IK10 rated vapour-proof LED luminaire, suitable for a range of surface-mounted applications.


- IP65 anti-corrosive module
- IK10 impact resistance rating
- Robust injection moulded polycarbonate body
- Clear vapour proof high impact diffuser
- Efficacy up to 152 lm/W
- 3-Step MacAdam
- Quick release flush mounted fixing clips
- Dimming, sensor and emergency options available



## SPECIFICATION

Luminous Flux	2775 - 5500 Lumens
Colour Temperature CCT	300K   4000K
Power Consumption	19W   36W
CRI	80
Efficacy	152 lm/W
Dimming	Fixed Output   SwitchDim   DALI
Operating Voltage	220 – 240V
Mains Frequency	50-60Hz
Lifetime	60,000hrs
Installation	Surface Mounted
Length	L 1500 mm
Module Dimensions	W 104 mm x H 80 mm
Ingress Protection	IP65
Impact Rating	IK10
Weight	4kg
Material	Polycarbonate Module
Operating Temperature	-25°C ~35°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

## DIMENSIONS

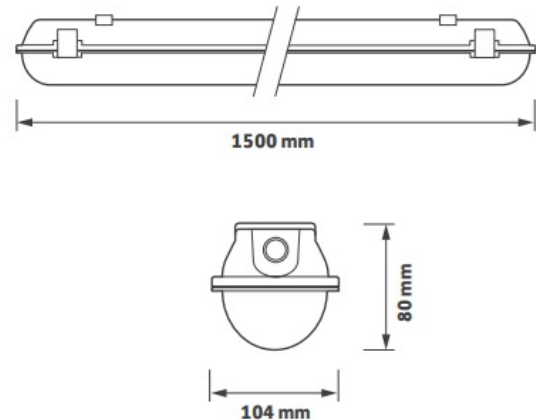

### PRODUCT ORDER CODE

EXAMPLE: ERGUN/19W/4K/FO/ST

PREFIX	WATTAGE	CCT	DRIVER	EMERGENCY
ERGUN	19W	<b>3K</b> 3000K	<b>FO</b> fixed output	<b>ST</b> standard emergency
	36W	<b>4K</b> 4000K	<b>SW</b> switchdim  <b>DALI</b> DALI dimming	<b>DEM</b> dali emergency