

FEATURES

LINA is a high-performance surface-mounted module that offers direct and precise illumination. It can be customised to suit any interior application and includes a range of beam angle and colour temperature options.



- Efficacy up to 118 lm/W
- Direct illumination
- Compact fixed output or DALI dimming
- Extruded lightweight aluminium housing
- Black finish
- CRI90
- IP20



SPECIFICATION

Luminous Flux	1604 Lumens
Colour Temperature CCT	2700K 3000K 3500K 4000K
Power Consumption	13.5W
CRI	90
Efficacy	118 lm/W
Beam Angle	12° 25° 40° 60°
Dimming	Fixed Output DALI
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Finish	Black RAL
Installation	Surface
Dimensions - Standard	126 mm x 75 mm x 75 mm x Ø70
Dimensions - DALI	160 mm x 75 mm x 75 mm x Ø70
Ingress Protection	IP20
Material	Extruded aluminium
Operating Temperature	-25°C ~50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

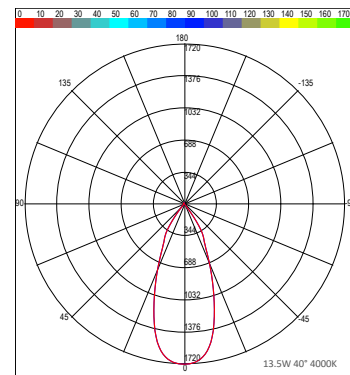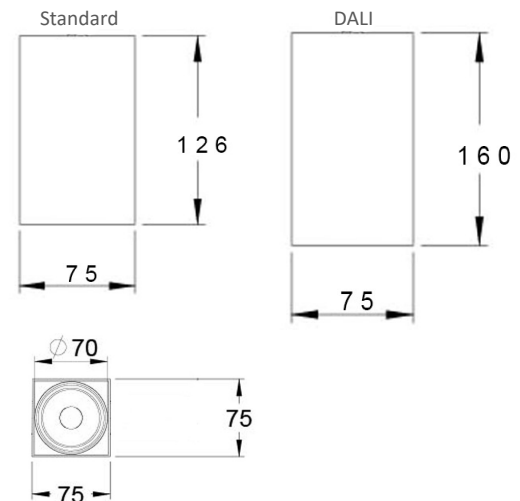

PRODUCT ORDER CODE

EXAMPLE: LINA-S/13.5W/SUR/25/3K/DALI/BL

PREFIX	INSALLATION	BEAM ANGLE	CCT	DRIVER	FINISH
LINA-S/13.5W	SUR surface	12 12° narrow beam	27K 2700K	FO fixed output DALI DALI dimming	BL black RAL9005 RAL custom colour on request
		25 25° medium beam	3K 3000K		
		40 40° wide beam	35K 3500K		
		60 60° extra wide beam	4K 4000K		