

### FEATURES

LINK is a compact 48V system that redefines the track lighting concept, offering a minimal design, quick installation and endless lighting configurations. The LINK is perfect for architectural or commercial projects.



- Opal linear luminaire
- Available in multiple lengths
- Efficacy up to 84 lm/W
- Alternate fittings without tools
- Black or white finish
- Aluminium housing
- Compact fixed output or DALI dimming
- 48V track system
- UGR 19 compliant, CRI90, IP20



### SPECIFICATION

|                        |  |
|------------------------|--|
| Luminous Flux          | 1100 - 2200 Lumens                                       |
| UGR                    | 19   |
| Colour Temperature CCT | 2700K   3000K   4000K                                    |
| Power Consumption      | 13W   19W   26W  |
| CRI                    | 90   |
| Beam Angle             | 100°   |
| Efficacy               | 84 lm/W  |
| Dimming                | Fixed Output   DALI                                      |
| Input Voltage          | 48V DC   |
| Lifetime               | 50,000hrs  |
| Finish                 | Matt White   Matt Black                                  |
| Installation           | Track Mounted  |
| Dimensions             | 42.8 mm x 22.6 mm  |
| Length Options         | 579 mm   867 mm   1155 mm                                |
| Ingress Protection     | IP20   |
| Operating Temperature  | -25°C ~50°C  |
| Conformity             | Thermal Management System<br>No UV or IR Emissions, UKCA |
| Warranty               | 5 Years  |

### DIMENSIONS

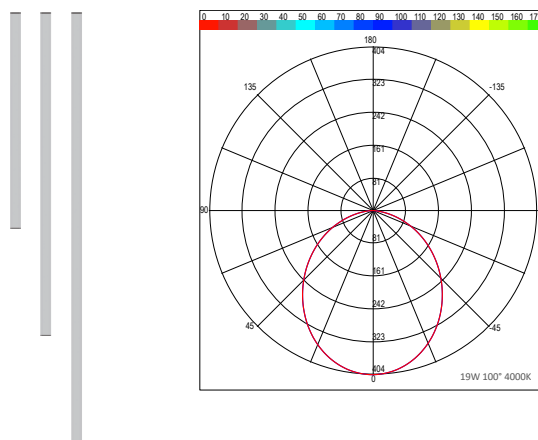

### PRODUCT ORDER CODE

EXAMPLE: LINK-OPAL/579/3K/DALI/BL

| PREFIX    | LENGTH                    | CCT                  | DRIVER                      | FINISH                  |
|-----------|---------------------------|----------------------|-----------------------------|-------------------------|
| LINK-OPAL | <b>579</b><br>579mm/13W   | <b>27K</b><br>27000K | <b>FO</b><br>fixed output   | <b>WH</b><br>matt white |
|           | <b>867</b><br>867mm/19W   | <b>3K</b><br>3000K   | <b>DALI</b><br>DALI dimming | <b>BL</b><br>matt black |
|           | <b>1155</b><br>1155mm/26W | <b>4K</b><br>4000K   |                             |                         |

