

### FEATURES

The EM-SIGN 1 is a high-quality emergency exit sign. It offers bright and even illumination across the legend panel ensuring maximum visibility in the event of an emergency and is BSI Kitemark Certified.

The poxy-coated steel enclosure is wall or surface mounted and provides a viewing distance of 36 metres. The EC or ISO legend panels are available in arrow up, arrow down, arrow left or arrow right. When ordering please specify your panel requirements.


EM-SIGN 1 is specified in a non-maintained or maintained emergency operation. DALI/Self-Test options are also available and include an integral DALI self-test gear or standard DALI operation which is fully interoperable when connected to an existing DALI control system.



### SPECIFICATION

### DIMENSIONS

Installation	Wall/Surface
Viewing Distance Options	36m
Input Voltage	230V 50Hz
Colour Temperature CCT	4500K
Power (Maintained)	3W
Power (Non-Maintained)	2.4W
Battery Type	1 x 3.6V 1.5Ah NiCd
IP Rating	IP20
Material	Epoxy Coated Steel Body Polycarbonate Legend Panel
Dimensions	L 385mm x W 185mm x H 71mm
Legend Panels	Arrow Up   Arrow Down   Arrow Left   Arrow Right
Temperature	0°C ~ 25°C
Weight	1.6kg
Conformity	Class I, UKCA, EN60598.2.22
Warranty	5 Years

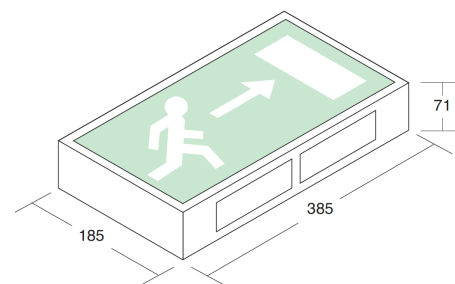

### PRODUCT ORDER CODE

EXAMPLE: EM-SIGN 1/W/M/AU

PREFIX	EMERGENCY	LEGEND PANELS
EM-SIGN 1 /W	<b>M</b> maintained emergency  <b>NM</b> non-maintained emergency  <b>DEM</b> DALI self-test	<b>AU</b> arrow up  <b>AD</b> arrow down  <b>AR</b> arrow right  <b>AL</b> arrow left

