

## FEATURES

- Streamline linear luminaire
- Extruded aluminium profile body
- Surface or suspended mounting
- Colour temperature choice
- High lumen efficacy
- UGR compliant, CRI90
- Frosted opal or low-glare prismatic optic diffuser
- Direct or direct/indirect light distribution
- Standard and made-to-measure profile lengths
- Custom configurations are available with mitred corners and coupler joints
- Anodised or painted profile finish
- Compact integral driver, DALI dimming and Casambi controls available
- Standard or DALI 3-hour emergency options
- Zero light spill with firm-fit end caps
- Plug-and-play wiring for quick installation
- Serviceable from the underside with easy access to internal components







## SPECIFICATION

Colour Temperature CCT	2700K   3000K   4000K   TW
Installation	Surface   Suspended
Distribution	Direct   Direct/Indirect
CRI	>90
Optic - Diffuser	Frosted Opal   Prismatic
UGR	≤19 (prismatic optic)
Dimming	Fixed Output   DALI   Casambi Control
Finish	White   Black   Silver Anodised
Dimensions	W 56 mm x H 70 mm Lengths to be confirmed
Configurations	Mitred Corners   Coupler Joints
Operating Voltage	220V – 230V
Lifetime	50,000hrs
Emergency Options	3-hour standard   DALI
Ingress Protection	IP20
Operating Temperature	-25°C~50°C
Conformity	Thermal Management System No UV or IR Emissions
Warranty	5 Years

## DIMENSIONS

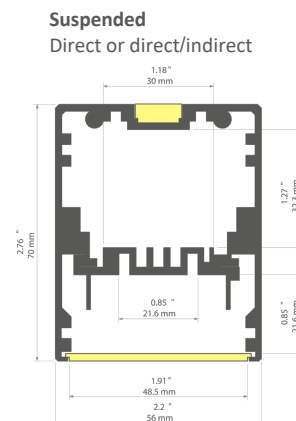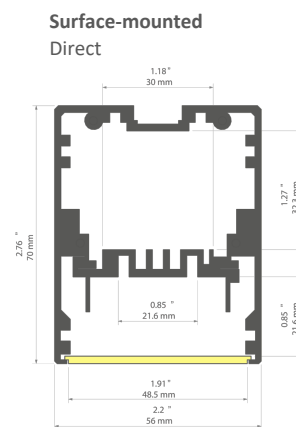

## PRODUCT ORDER CODE

EXAMPLE: LINK50/SUS/DID/3K/O/DALI/BL/DEM/1000 (custom length - mm)

PREFIX	INSALLATION	DISTRIBUTION	CCT	OPTIC-DIFFUSER	DRIVER	FINISH	EMERGENCY
LINK50	<b>SUS</b> suspended 2m kit  <b>SUR</b> surface	<b>D</b> direct	<b>27K</b> 2700K	<b>O</b> frosted opal	<b>FO</b> fixed output	<b>A</b> anodised aluminium	<b>ST</b> standard emergency
		<b>DID</b> direct/indirect	<b>3K</b> 3000K	<b>P</b> prismatic	<b>DALI</b> DALI dimming	<b>WH</b> white RAL 9010	<b>DEM</b> dali emergency
			<b>4K</b> 4000K	<b>OI</b> opal indirect optic		<b>BL</b> black RAL 9005	<b>CAS</b> casambi
			<b>TW</b> tunable white	<b>RAL</b> custom RAL colour			

