


FEATURES

3-circuit DALI TRACK with a comprehensive range of innovative DALI accessories giving designers maximum freedom to create unique and smart track systems.

The track can be surface, suspended or recessed mounted and is available in a range of lengths. Individual luminaires featuring DALI adaptors can be installed securely into the track and is perfect for architectural or commercial projects.


- 3-circuit DALI system
- Extruded aluminium
- Cross-section copper conductors
- Recessed, suspended or surface mounted
- Steel wire suspension brackets
- Standard track lengths
- Quick installation
- Black, grey or white finish
- DALI 3-circuit connector accessories available

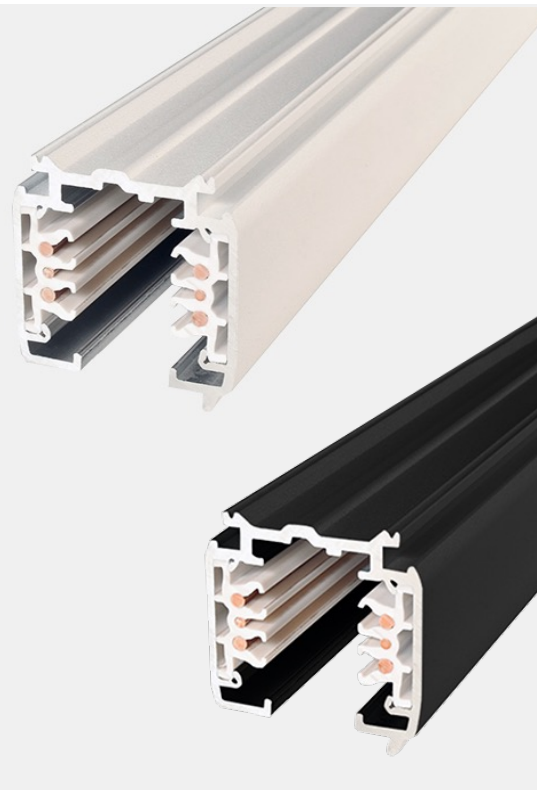

SPECIFICATION

Dimming	DALI
Finish	White Black Grey
Installation	Recessed Surface Suspended
Dimensions	H 35.5 mm x W 35.2 mm
Length	1000 mm 2000 mm 3000 mm
Operating Voltage	230 V / 16A
Ingress Protection	IP20
Weight	1.1 kg p/m
Accessories	Corners Connectors Endcaps Covers
Suspension Kit	Steel Wire 2m
Material	Aluminium and Copper
Operating Temperature	-25°C~50°C
Conformity	Thermal Management System UKCA
Warranty	5 Years

DIMENSIONS

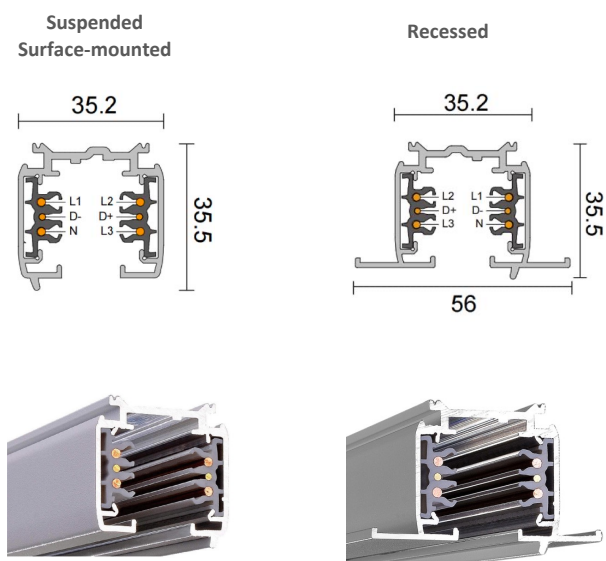

ACCESSORIES - available in a white, black or grey finish.

				
Connector Left 98.5 x 35.2 mm	Connector Right 98.5 x 35.2 mm	Connector Middle 166 x 35.2 mm	Connector Flexible 248.6 mm	Connector Adjustable 248.6 x 35.2 mm
				
X Connector 166.2 x 166.2 mm	L Connector Left 67.4 x 67.4 mm	R Connector Left 67.4 x 67.4 mm	T Connector Left 166 x 100 mm	T Connector Right 166 x 100 mm
				
Twisted L Connector 100 x 100 mm	Twisted T Connector 166 x 100 mm	Straight Coupler 68 x 20.5 mm	Coupler (Insulation) 66.4 x 20 mm	End Cap 31.3 x 35.2 mm
				
L Cover 77.6 x 77.6 mm	T Cover 99 x 77.6 mm	Live End Cover 56.2 x 64.3 mm	X Cover 99 x 99 mm	Straight Cover 99 x 56.2 mm



PRODUCT ORDER CODE

EXAMPLE: DALITRACK/1/SUS/BL/CA/EC

PREFIX	LENGTH	INSALLATION	FINISH	ACCESSORIES - CONNECTORS	ACCESSORIES
DALITRACK	1 1000 mm	SUS suspended 2m kit	WH white RAL 9010	CL connector – left	SC straight coupler
	2 2000 mm	SUR surface	BL black RAL 9011	CR connector – right	CI straight coupler insulation
	3 3000 mm	REC recessed	GR grey RAL 7040	CF connector – flexible	EC end cap
				CA connector – adjustable	XCO x cover
				CM connector – middle	SCO straight cover
				XC x-connector	LCO l cover
				LCL l-connector left	TCO t cover
				LCR l-connector right	LECO live end cover
				TCL t-connector left	
				TCR t-connector right	
				TLC twisted l-connector	
				TTC twisted t--connector	