


FEATURES

The MEYER SLIM is a 600 x 600 mm slimline LED fitting that is developed to offer maximum flexibility with a focus on low glare. The wireless connectivity and emergency options make the MEYER a perfect luminaire for office, commercial and educational applications.



- 600 x 600 mm panel
- Efficacy up to 119 lm/W
- Low glare UGR <19 compliant
- CRI80, IP20
- Lumen maintenance up to L80/F10 @ 50,000 hours
- Compact driver and DALI dimming controls
- Emergency options
- Self-extinguishing TP(a) diffuser option
- Surface, suspended and plaster-in recessed kits

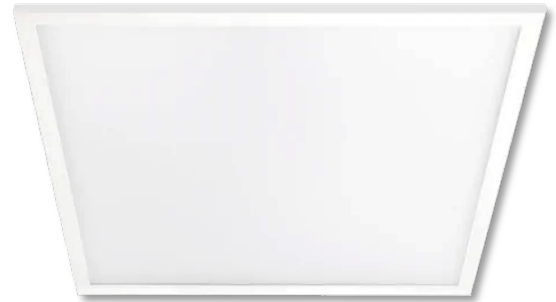

SPECIFICATION

Luminous Flux	2689 - 3900 Lumens
UGR	<19
Colour Temperature CCT	3000K 4000K
Power Consumption	25W 26W 34W 36W
CRI	>80
Efficacy	Up to 119 lm/W
Dimming	Fixed Output DALI
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Finish	White
Installation	Recessed Surface Suspended
Dimensions	W 595 x L 595 x D 8.5mm
Ingress Protection	IP20
Weight	2.7 kg
Operating Temperature	-25°C ~25°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

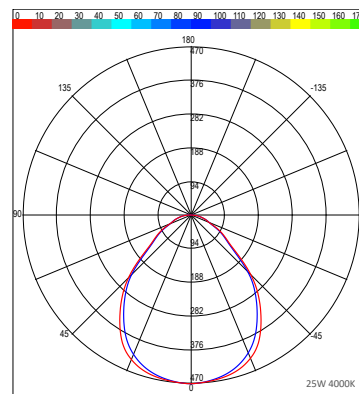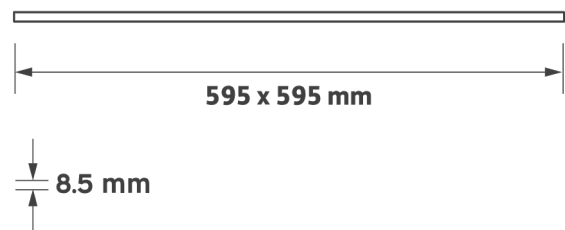

PRODUCT ORDER CODE

EXAMPLE: MEYER-SLIM/REC/25W/4K/FO/WH/ST

PREFIX	INSALLATION	WATTAGE	CCT	DRIVER	FINISH	EMERGENCY	CASAMBI
MEYER-SLIM	REC recessed	25W	3K 3000K	FO fixed output	WH white	ST standard emergency	CAS casambi
	SUR surface	26W	4K 4000K	DALI DALI dimming		DEM dali emergency	
	SUS suspended	34W					
	P recessed plaster-in	36W					

