

FEATURES

High-quality recessed or surface mounted exit sign that ensures maximum visibility in the event of an emergency. The luminaire can be wired for either maintained or non-maintained operations. Self-test versions can be remotely controlled to enable function and duration tests on demand, check the status of the battery and programme automated self-tests.



- Self-contained emergency LED exit box
- Viewing distance of 30 metres
- A range of legend panels available
- Li-Ion battery with 5 year warranty
- Maintained or non-maintained configurations as standard
- IP20 and suitable for indoor applications
- Optional remote control available (REM10)
- 30 second functional test carried out automatically
- 3hr duration test every 52 weeks



SPECIFICATION

Viewing Distance	30m
Power (Maintained)	3W
Power (Non-Maintained)	0.5W
Emergency Duration	3-hour
Operating Voltage	220 – 240V AC 50Hz
Charge	< 24 hr
Battery Type	Li-Ion 3.6V 2.5Ah
Lifetime	50,000hrs
Installation	Recessed Surface
Dimensions	L 341 mm x W 46 mm x H 247 mm
Legend Panels	Arrow Up Arrow Down Arrow Left/Right
Ingress Protection	IP20
Impact Rating	IK07
Insulation Class	II
Material	Polycarbonate
Finish	Matt White
Weight	1 kg
Operating Temperature	0°C ~40°C
Conformity	Thermal Management System No UV or IR Emissions, RoHS, UKCA
Warranty	5 Years

DIMENSIONS

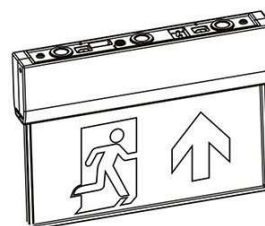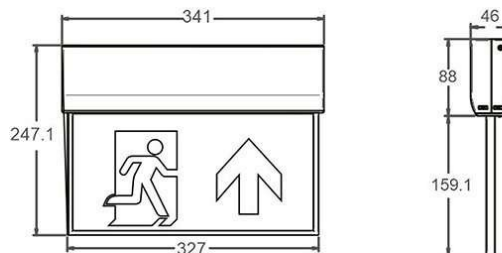

PRODUCT ORDER CODE

EXAMPLE: EM-SIGNAFO/S/DEM/AD

PREFIX	INSALLATION	EMERGENCY	LEGEND PANELS
EM-SIGN AFO	<p>S surface</p> <p>R recessed</p>	<p>S standard maintained or non-maintained</p> <p>ST self-test maintained or non-maintained</p>	<p>AU arrow up</p> <p>AD arrow down</p> <p>ARL arrow right/left</p>

