

## FEATURES

LEVI is a robust industrial luminaire, ideal for warehouse and factory applications. Available in two sizes and a range of colour temperature options. LEVI features a plug and play system to minimise installation costs and future maintenance requirements.



- Efficacy up to 148 lm/W
- Colour temperature choice
- Clear diffuser
- Compact driver
- Mounting brackets available
- Dimming and emergency options
- IP20



## SPECIFICATION

Luminous Flux	15310 - 30620 Lumens
Colour Temperature CCT	3000K   4000K   5000K
Power Consumption	103W   206W
Efficacy	Up to 148.6 lm/W
Dimming	Fixed Output   SwitchDIM   DALI
Lifetime	50,000hrs
Finish	White
Installation	Surface
Dimensions – 103W	790 mm x 357 mm x 57 mm
Dimensions – 206W	1450 mm x 357 mm x 57 mm
Emergency Option	Standard Integral Emergency
Ingress Protection	IP20
Diffuser	Clear
Material	Aluminium
Weight	5.7 – 6.1 kg
Operating Temperature	-25°C ~ 50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

## DIMENSIONS

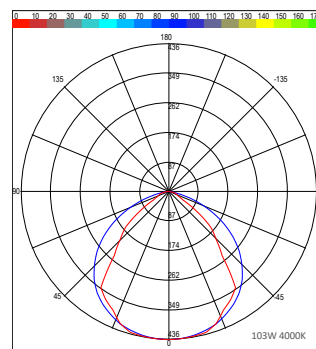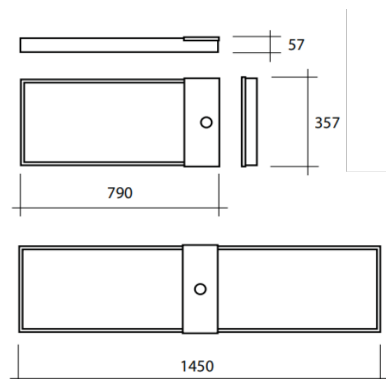

## PRODUCT ORDER CODE

CODE	WATTAGE	DIMENSIONS	CCT	WEIGHT	CURRENT	LUMINAIRE LUMENS	REPLACES
LEVI/103W/3K	103W	790 mm x 357 mm x 57 mm	3000K	5.7 KG	59A 176µs	18012	250W /400 SON/MH
LEVI/103W/4K	103W	790 mm x 357 mm x 57 mm	4000K	5.7 KG	59A 176µs	18012	250W /400 SON/MH
LEVI/103W/5K	103W	790 mm x 357 mm x 57 mm	5000K	5.7 KG	59A 176µs	18012	250W /400 SON/MH
LEVI/206W/3K	206W	1450 mm x 357 mm x 57 mm	3000K	6.1 KG	108A 176µs	30620	600W MH
LEVI/206W/4K	206W	1450 mm x 357 mm x 57 mm	4000K	6.1 KG	108A 176µs	30620	600W MH
LEVI/206W/5K	206W	1450 mm x 357 mm x 57 mm	5000K	6.1 KG	108A 176µs	30620	600W MH

ADDITIONAL OPTIONS	FO	SW	DALI	ST	CF	PIR	S
	Fixed Output	SwitchDim	DALI dimming	Standard integral emergency self-test	Corridor function	Programmable PIR sensor	Surface mounting bracket