


FEATURES

The SAIL MIDI is a contemporary luminaire for wall or surface-mounted applications.



- High efficiency, up to 140 lm/W
- 3000K or 4000K colour temperature
- Die-cast aluminium body in black or anthracite
- IP65 ingress protection against humidity and dust
- IK10 impact rating
- Screw fixings within the terminal back, suitable for rear and side cable entry
- PCB integrated with a diffuser for easy installation
- Emergency options
- Microwave sensors available
- Optional open area or asymmetric light distribution

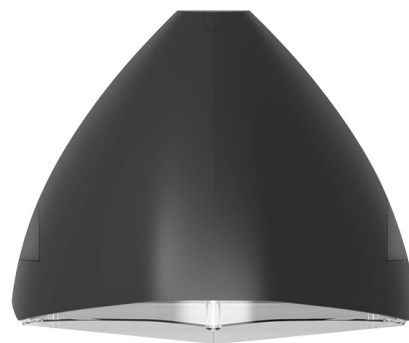

SPECIFICATION

Luminous Flux	Up to 1550lm
Colour Temperature CCT	3000K 4000K
Power Consumption	7W/8W/10W/12W
Efficacy	Up to 140 lm/W
Control	Fixed Output
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Finish	Black Anthracite
Installation	Wall/Surface
Dimensions	260 mm x 214 mm x 136 mm
Ingress Protection	IP65
Impact Rating	IK10
Material	Aluminium/Polycarbonate
Operating Temperature	-20°C ~40°C
Conformity	Thermal Management System No UV or IR Emissions, RoHS, UKCA
Warranty	5 Years

DIMENSIONS

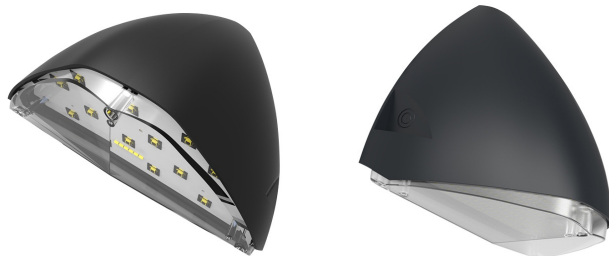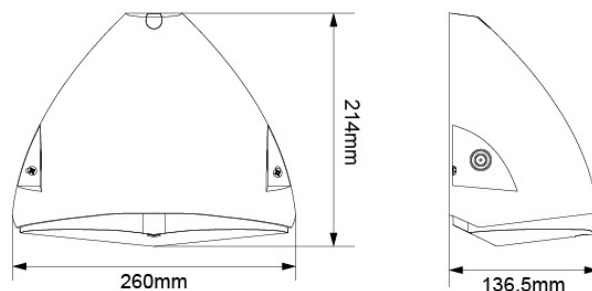

PRODUCT ORDER CODE

EXAMPLE: SAIL/7W/3K/FO/BL/ST

PREFIX	WATTAGE/LUMENS	CCT	DRIVER	FINISH	EMERGENCY	CASAMBI
SAIL	7W 950lm	3K 3000K	FO fixed output	BL black	ST standard emergency	S microwave sensor
	8W 1150lm	4K 4000K	CAS casambi	A anthracite		PIR PIR sensor
	10W 1400lm					
	12W 1550lm					