

FEATURES

LINK is a compact 48V system that redefines the track lighting concept, offering a minimal design, quick installation and endless lighting configurations. The LINK is perfect for architectural or commercial projects.



- Spotlight luminaire
- Efficacy up to 86 lm/W
- Alternate fittings without tools
- 90° adjustable tilt, 359° rotational arm
- Black or white finish
- Aluminium housing
- Compact fixed output or DALI dimming
- 48V track system
- UGR 19 compliant, CRI90, IP20



SPECIFICATION

Luminous Flux	520 – 1630 Lumens
UGR	19
Colour Temperature CCT	2700K 3000K 4000K
Power Consumption	6W 13W 19W
CRI	90
Beam Angle	15° 28° 40° 60°
Efficacy	86 lm/W
Dimming	Fixed Output DALI
Input Voltage	48V DC
Lifetime	50,000hrs
Finish	Matt White Matt Black
Installation	Track Mounted
Dimensions	Ø60 mm x 80 mm 120 mm 160 mm
Ingress Protection	IP20
Operating Temperature	-25°C ~50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

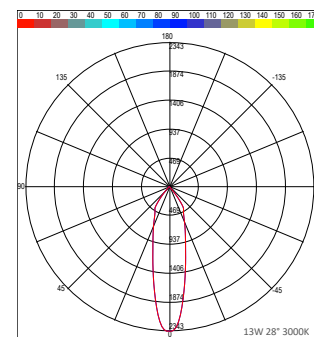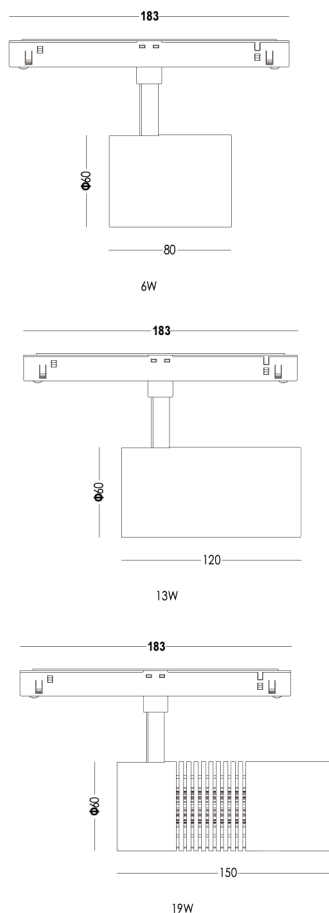

PRODUCT ORDER CODE

EXAMPLE: LINK-SPOT/13W/28/3K/DALI/BL

PREFIX	WATTAGE	BEAM ANGLE	CCT	DRIVER	FINISH
LINK-SPOT	6W	15 15° beam angle	27K 2700K	FO fixed output	WH matt white
	13W	28 28° beam angle	3K 3000K	DALI DALI dimming	BL matt black
	19W	40 40° beam angle	4K 4000K		
		60 60° beam angle			

