

FEATURES

The VIN is a tough IP65 / IK08 rated vapour-proof LED luminaire, suitable for a range of surface-mounted applications. Its narrow design features a high efficiency opal diffuser. Available in a range of standard lengths.


- IP65 anti-corrosive module
- IK08 impact resistance rating
- Robust injection moulded polycarbonate body
- Vapour proof high impact diffuser
- Efficacy up to 140 lm/W
- Quick release stainless steel mounting clips
- Sensor and emergency options available




SPECIFICATION

Luminous Flux	Up to 6900 Lumens
Colour Temperature CCT	4000K
Power Consumption	19W – 50W
CRI	80
Efficacy	140 lm/W
Dimming	Fixed Output
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Installation	Surface Mounted
Length	1190 mm 1490 mm
Module Dimensions	W 95 mm x H 75 mm
Ingress Protection	IP65
Impact Rating	IK08
Material	Grey Polycarbonate Module
Operating Temperature	-25°C ~35°C
Accessory Options	Cable Gland Emergency PIR
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	3 Years

DIMENSIONS

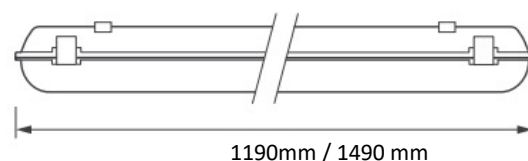

1190mm / 1490 mm

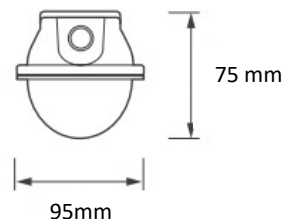

75 mm

95mm



PRODUCT ORDER CODE

EXAMPLE: VIN/19W/4K/FO/ST/CB

PREFIX	WATTAGE/LUMENS/LENGTH	CCT	DRIVER	EMERGENCY	ACCESSORIES
VIN	19W 2800lm 1190mm x 73mm x 75mm	4K 4000K	FO fixed output	ST standard emergency	S microwave sensor
	30W 4100lm 1490mm x 73mm x 75mm				PIR PIR sensor
	38W 5000lm 1190mm x 95mm x 75mm				CG cable gland
	50W 6900lm 1490mm x 95mm x 75mm				