

FEATURES

AVA is a recessed compact downlight with exceptional performance. AVA's innovative glare control design and height measuring only 42mm is well-suited for modern interior applications.



- Efficacy up to 140 lm/W
- Low glare diffuser
- Low-profile aluminium housing
- Fixing clamps for quick recessed installation
- DALI dimming controls available
- CRI80



SPECIFICATION

Luminous Flux	1400 - 1520 Lumens
Colour Temperature CCT	3000K 4000K 5000K 6000K
Power Consumption	10W
CRI	>80
Efficacy	140 lm/W
UGR	22
MacAdam Ellipse	3
Beam Angle	84°
Diffuser	Microprismatic
Controls	Fixed Output DALI
Operating Voltage	220 – 240V
Finish	White Black Grey
Installation	Recessed
Dimensions	∅ 155 mm x 42 mm
Cut-out Dimensions	∅ 135 mm
Minimum Installation Height	94 mm
Ingress Protection	IP20-IP54
Weight	0.3 kg
Lifetime	72,000hrs L70B10
Operating Temperature	-25°C ~35°C
Conformity	Thermal Management System No UV or IR Emissions, Class II
Warranty	5 Years

DIMENSIONS

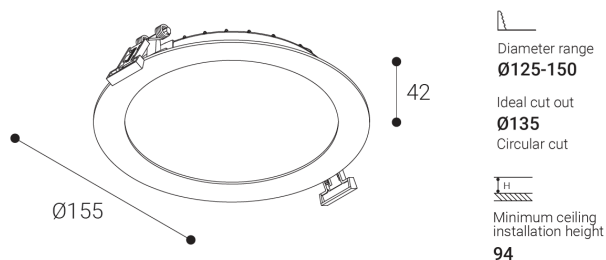

— C0-C180
— C90-C270

Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk

*Time under 3 h.

PRODUCT ORDER CODE

EXAMPLE: AVA155/10W/3K/DALI/G

PREFIX	WATTAGE	CCT	DRIVER	FINISH
AVA 155	10W	3K 3000K 4K 4000K 50K 5000K 60K 6000K	FO fixed output DALI DALI dimming	WH white RAL 9016 BL black RAL 9005 G grey RAL 7001



UK & CA IP20-IP54