


FEATURES

The SYSTEM MAGNETO range redefines the track lighting concept, offering quick installation and endless lighting configurations. The magnetic mounting allows fast and easy change over of all LED luminaires, perfect for architectural or commercial projects.



- Linear luminaire
- Efficacy up to 110 lm/W
- Alternate fittings without tools
- Black or white finish
- Aluminium housing
- Compact fixed output or DALI dimming
- 48V track system
- UGR 19 compliant, CRI90, IP20

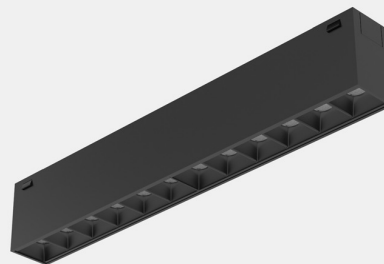

SPECIFICATION

Luminous Flux	Up to 1650 Lumens
UGR	19
Colour Temperature CCT	2700K 3000K 4000K
Power Consumption	8W 15W
CRI	90
Beam Angle	30° 45°
Efficacy	110 lm/W
Dimming	Fixed Output DALI
Input Voltage	48V DC
Lifetime	50,000hrs
Finish	Matt White Matt Black
Installation	Magnetic Track Mounted
Dimensions	56 mm x 34 mm
Length	163 mm 322 mm
Ingress Protection	IP20
Operating Temperature	-25°C ~50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

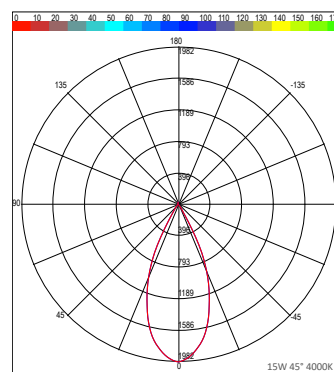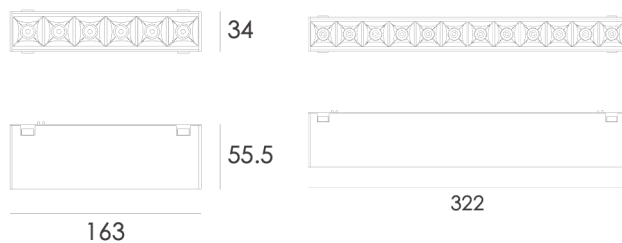

PRODUCT ORDER CODE

EXAMPLE: MAG-DOT/322/3K/DALI/BL

PREFIX	LENGTH	BEAM ANGLE	CCT	DRIVER	FINISH
MAG-DOT	163 163mm/8W	30 30° beam angle	27K 2700K	FO fixed output	WH matt white
	322 322 mm/15W	45 45° beam angle	3K 3000K	DALI DALI dimming	BL matt black
			4K 4000K		

