

FEATURES

EM-SAFE is a self-contained emergency bulkhead fortified with IP65 ingress protection, perfectly suited for both indoor and outdoor applications. This unit delivers 3 hours of emergency lighting and provides flexibility with a high or low lumen output choice. Each unit arrives complete with self-adhesive legend panels for swift installation.


- Maintained or non-maintained
- Self-test versions and remote controls are available
- Sleek polycarbonate design offers an ultra-slim profile
- Versatile mounting options: ceiling or recessed installation
- Boasts an impressive IK10 impact rating for enhanced durability



SPECIFICATION

High Lumen Output	320 lm
Low Lumen Output	170 lm
Input Voltage	AC200-240V AC 50Hz
Power	Maintained 3W Non Maintained 0.5W
Duration	3 hours
Recharge Duration	24 hours
Battery Type	Li-ion 3.6V 2.5Ah
Ingress Protection	IP65
Impact Rating	IK10
Insulation Class	II
Operating Temperature	0°C ~ 40°C
Storage Temperature	0°C ~ 50°C
Material	Polycarbonate
Finish	Matt White
Dimensions	L 355mm x W 109 mm x D 60 mm
Installation	Surface Recessed
Legend Panels	Self-adhesive
Lifetime	50,000hrs
Weight	0.5kg
Conformity	UKCA, CE, RoHS, BS 60598-2-22 and ISO 7010
Warranty	5 Years

DIMENSIONS

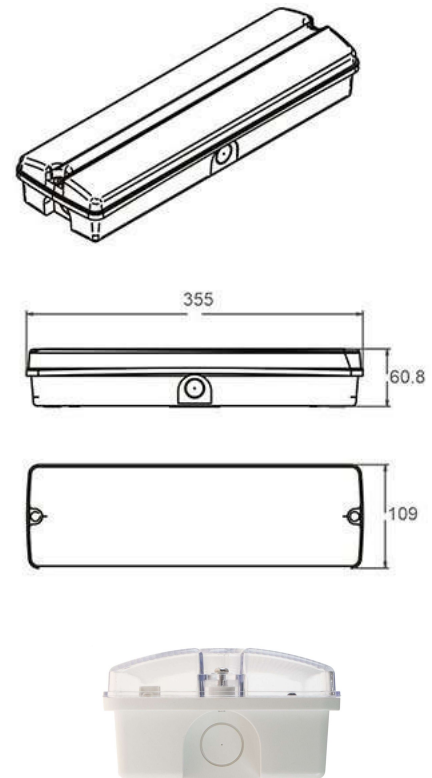

PRODUCT ORDER CODE

EXAMPLE: EM-SAFE/H/SUR/EM

PREFIX	OUTPUT	INSTALLATION	EMERGENCY
EM-SAFE	H high output 170lm L low output 320 lm	SUR surface REC recessed	EM standard 3hr emergency EMST 3hr emergency self-test