


FEATURES

The SYSTEM MAGNETO range redefines the track lighting concept, offering quick installation and endless lighting configurations. The magnetic mounting allows fast and easy changeover of all LED luminaires, perfect for architectural or commercial projects.



- Opal linear luminaire
- Efficacy up to 107 lm/W
- Alternate fittings without tools
- Black or white finish
- Frosted acrylic diffuser
- Aluminium housing
- Compact fixed output or DALI dimming
- 48V track system
- UGR 19 compliant, CRI90, IP20

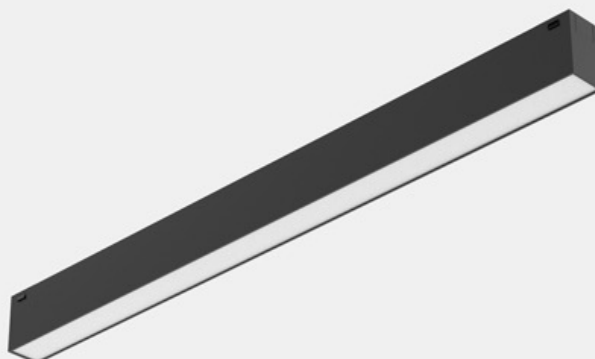

SPECIFICATION

| | |
|------------------------|----------------------------------------------------------|
| Luminous Flux | 1430 - 4290 Lumens |
| UGR | 19 |
| Colour Temperature CCT | 2700K 3000K 4000K |
| Power Consumption | 13W 26W 39W |
| CRI | 90 |
| Beam Angle | 95° |
| Efficacy | 107 lm/W |
| Dimming | Fixed Output DALI |
| Input Voltage | 48V DC |
| Lifetime | 50,000hrs |
| Finish | Matt White Matt Black |
| Installation | Magnetic Track Mounted |
| Dimensions | 56 mm x 34 mm |
| Length | 322 mm 640 mm 958 mm |
| Ingress Protection | IP20 |
| Operating Temperature | -25°C ~50°C |
| Conformity | Thermal Management System No UV or IR Emissions, UKCA |
| Warranty | 5 Years |

DIMENSIONS

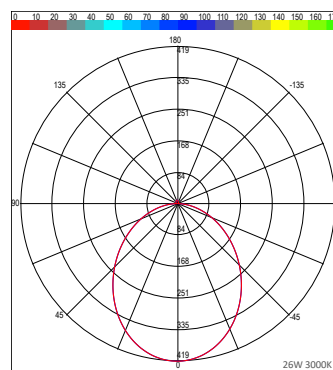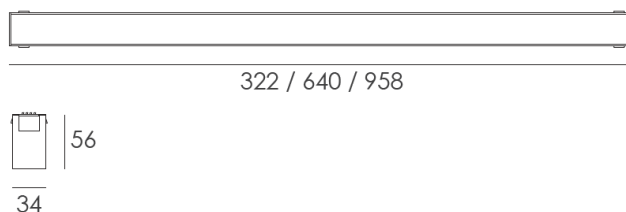

PRODUCT ORDER CODE

EXAMPLE: MAG-OPAL/322/3K/DALI/BL

| PREFIX | LENGTH | CCT | DRIVER | FINISH |
|----------|--------------------------|---------------------|-----------------------------|-------------------------|
| MAG-OPAL | 322 322mm/13W | 27K 2700K | FO fixed output | WH matt white |
| | 640 640 mm/26W | 3K 3000K | DALI DALI dimming | BL matt black |
| | 958 958mm/39W | 4K 4000K | | |

