

FEATURES

The SYSTEM MAGNETO range redefines the track lighting concept, offering quick installation and endless lighting configurations. The magnetic mounting allows fast and easy change over of all LED luminaires, perfect for architectural or commercial projects.



- Spotlight luminaire
- Efficacy up to 95 lm/W
- Alternate fittings without tools
- 90° adjustable tilt, 359° rotational arm
- Black or white finish
- Aluminium housing
- Compact fixed output or DALI dimming
- 48V track system
- UGR 19 compliant, CRI90, IP20



SPECIFICATION

Luminous Flux	Up to 1212 Lumens
UGR	19
Colour Temperature CCT	2700K 3000K 4000K
Power Consumption	12.5W
CRI	90
Beam Angle	15° 28° 30° 60°
Efficacy	95 lm/W
Dimming	Fixed Output DALI
Input Voltage	48V DC
Lifetime	50,000hrs
Finish	Matt White Matt Black
Installation	Magnetic Track Mounted Pendant
Dimensions	Ø60 mm x 120 mm x 34 mm
Ingress Protection	IP20
Operating Temperature	-25°C ~50°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

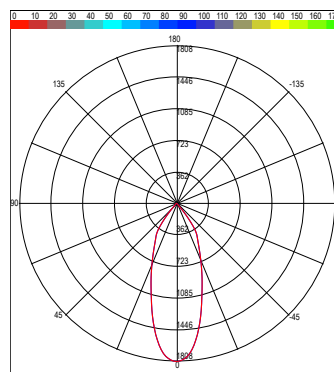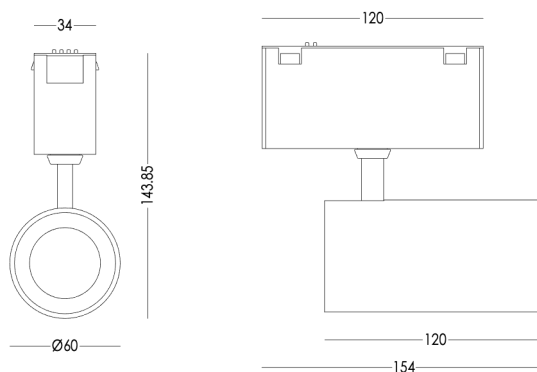

PRODUCT ORDER CODE

EXAMPLE: MAG-SPOT60/12.5W/15/4K/DALI/BL

PREFIX	WATTAGE	BEAM ANGLE	CCT	DRIVER	FINISH
MAG-SPOT60	12.5W	15 15° beam angle	27K 2700K	FO fixed output	WH matt white
		28 28° beam angle	3K 3000K	DALI DALI dimming	BL matt black
		30 30° beam angle	4K 4000K		
		60 60° beam angle			

