

FEATURES

DOMINO is a minimalist luminaire in a rectangular format. Designed to provide a subdued light distribution thanks to high-performance reflectors and a transparent microprismatic PMMA diffuser with an optimised geometric structure.


- A range of lengths available
- Efficacy up to 68 lm/W
- Precision moulded reflector
- CRI80
- Colour temperature options



SPECIFICATION

| | |
|------------------------|--|
| Luminous Flux | 600 – 900 Lumens |
| Colour Temperature CCT | 2700K 3000K 4000K |
| Power Consumption | 4W - 30W |
| CRI | 90 |
| Efficacy | Up to 68 lm/W |
| Dimming | Fixed Output DALI |
| Beam Angle | 18° 25° 45° |
| Macadam | 3 |
| Operating Voltage | 220 – 240V |
| Finish - Body | White RAL 9003 Black RAL 9005 |
| Finish - Reflector | White RAL 9003 Black RAL 9005 |
| Installation | Recessed |
| Dimensions | 45 x 45 x 50 mm – 1 Optic 75 x 45 x 50 mm – 2 Optics 145 x 45 x 50 mm – 5 Optics 280 x 45 x 50 mm – 10 Optics 410 x 45 x 50 mm – 15 Optics |
| Material | Aluminium |
| Ingress Protection | IP20/IP44 |
| Weight | 0.3 kg |
| Lifetime | 50,000hrs L80 B10 |
| Operating Temperature | -0°C~35°C |
| Conformity | Thermal Management System No UV or IR Emissions, UKCA, Class II |
| Warranty | 5 Years |

DIMENSIONS

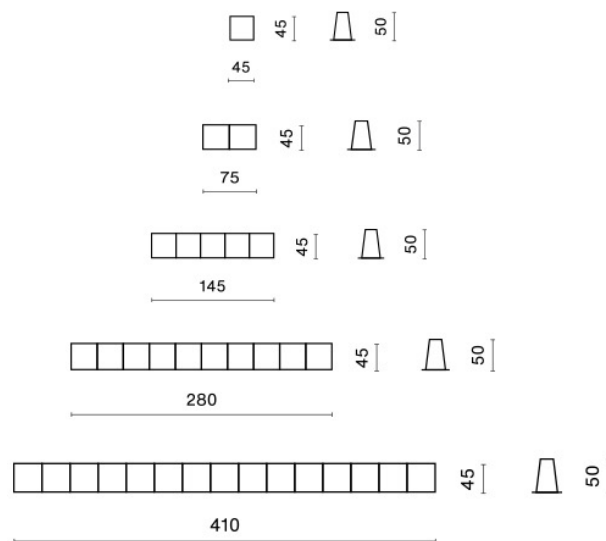

PRODUCT ORDER CODE

EXAMPLE: DOMINO/45/3K/20/FO/WH/WH

| PREFIX | SIZE | CCT | BEAM ANGLE | DRIVER | FINISH - BODY | FINISH - REFLECTOR |
|--------|--------------------------------|---------------------|-----------------------------|-----------------------------|----------------------------|----------------------------|
| DOMINO | 45 45 x 45 x 50 mm | 27K 2700K | 20 20° beam angle | FO fixed output | WH white RAL9003 | WH white RAL9003 |
| | 75 75 x 45 x 50 mm | 3K 3000K | 40 40° beam angle | DALI DALI dimming | BL black RAL9005 | BL black RAL9005 |
| | 145 145 x 45 x 50 mm | 4K 4000K | | | | |
| | 280 280 x 45 x 50 mm | | | | | |
| | 410 410 x 45 x 50 mm | | | | | |

