

FEATURES

KIERA + is an asymmetric recessed downlight with a sharp, defined cut-off and exceptional consistency across the whole beam width.



- Efficacy up to 110 lm/W
- Low glare wall wash design
- Precision moulded 20° or 40° reflector
- Die-cast aluminium bezel
- Fitted with an integral IP44 protective lens as standard
- Adjustable tilt
- Emergency options available



SPECIFICATION

Luminous Flux	600 – 900 Lumens
Colour Temperature CCT	2700K 3000K 4000K
Power Consumption	6.5W 8W 10W
CRI	80
Efficacy	Up to 110 lm/W
Dimming	Fixed Output SwitchDim DALI Casambi
Beam Angle	20° 40° asymmetric
Operating Voltage	220 – 240V
Finish - Body	White Black
Finish - Baffle	White Black
Installation	Recessed
Dimensions	85 mm x 85 mm x 105 mm
Cut-out Dimensions	81 mm x 81 mm
Material	Aluminium
Ingress Protection	IP20 (front IP44)
Weight	0.3 kg
Lifetime	50,000hrs
Operating Temperature	-25°C ~35°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

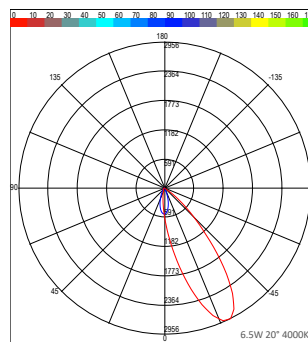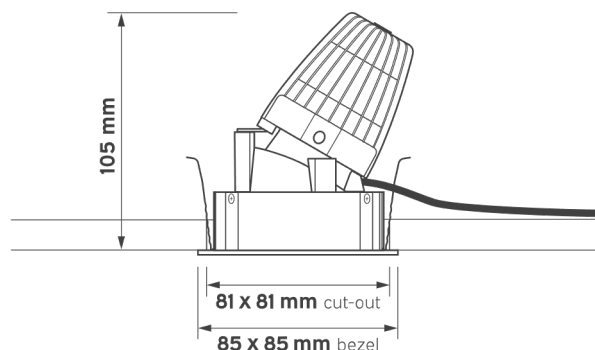

PRODUCT ORDER CODE

EXAMPLE: KIERAS+/8W/3K/20/FO/WH/WH/ST

PREFIX	WATTAGE	CCT	BEAM ANGLE	DRIVER	FINISH - BODY	FINISH - BAFFLE	EMERGENCY
KIERA S +	6.5W	27K 2700K	20 20° beam angle	FO fixed output	WH white RAL9003	WH white RAL9003	ST standard emergency
	8W	3K 3000K	40 40° beam angle	SW switchdim	BL black RAL9005	BL black RAL 9005	DEM dali emergency
	10W	4K 4000K		DALI DALI dimming			
				CAS casambi			