

FEATURES

EVO is a compact fire-rated downlight with the added advantage of IP65 ingress protection, an excellent choice for a range of lighting applications.



- Efficacy up to 96 lm/W
- White, black and brushed silver finish options
- Multi-faceted reflector
- Aluminium housing
- CRI80
- IP65
- Accredited fire rating FR90
- Emergency options available



SPECIFICATION

Luminous Flux	Up to 775 Lumens
Colour Temperature CCT	3000K 4000K
Power Consumption	8W
CRI	>80
Efficacy	96 lm/W
Dimming	Fixed Output DALI Casambi
Operating Voltage	220 – 240V
Lifetime	50,000hrs
Finish	White Black Brushed Silver
Installation	Recessed
Dimensions	∅ 85 mm x 60 mm
Cut-out Dimensions	∅ 73 mm
Material	Aluminium
Ingress Protection	IP65
Fire Rating	FR90
Weight	0.4 kg
Operating Temperature	-20°C ~ 35°C
Conformity	Thermal Management System No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

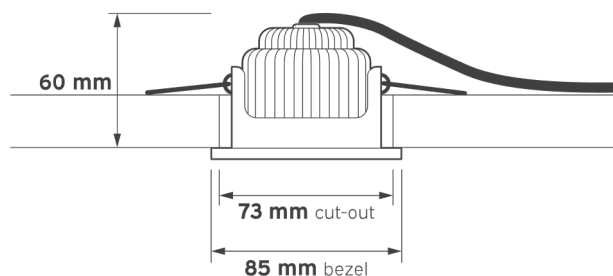

PRODUCT ORDER CODE

EXAMPLE: EVOIP65-83FW

PREFIX	WATTAGE	CCT	DRIVER	FINISH	EMERGENCY
EVO IP65-	8W	3 3000K	F fixed output	W white	SW standard emergency
		4 4000K	D DALI dimming	B black	DE dali emergency
			C casambi	S brushed silver	