



AURA – SUSPENDED RING PENDANT

AURA is a powerful and elegant suspended ring luminaire. It features an opal acrylic diffuser for consistent illumination and a circular die-cast aluminium profile form that fits harmoniously into the surrounding architecture. Available in a 600 mm or 1200 mm diameter and finished in black, white or grey.

FEATURES


- Ø1200 mm
- 4000K
- Up to 5025 lm
- Direct and indirect light distribution
- Optimal low-glare technology
- Opal diffuser for consistent illumination
- Suspended installation
- CRI80
- Compact driver
- DALI dimming options
- High quality aluminium body
- Black, white or grey finish
- Plug-and-play wiring for quick installation
- IP20 as standard
- 5 year warranty



SPECIFICATION

Colour Temperature CCT	4000K
Power	85 W
Luminous Flux	Up to 5025 lm
Efficacy	Up to 58 lm/W
CRI	80
Controls	Fixed Output DALI
Diffuser	Opal
Distribution	Direct Direct/Indirect
Finish	White RAL9016 Black RAL9005 Grey RAL9006
Dimensions	Ø1200 mm x H 105 mm
Operating Voltage	220-240V 50/60Hz
UGR	<22
Power Factor	>0.9
Material	Aluminium
Installation	Suspension 1.4m Wire Kit
Ingress Protection	IP20
Lifetime	50,000hrs L70 B50
Operating Temperature	-25°C ~35°C
Weight	15.6 kg
Conformity	No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS

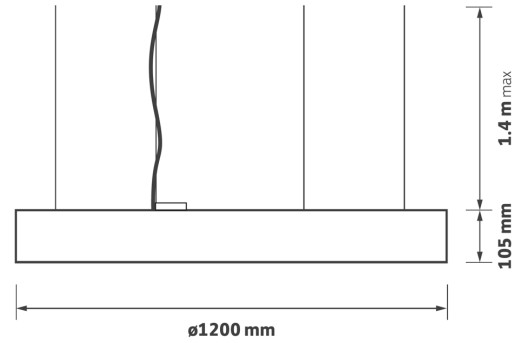

PRODUCT ORDER CODE

EXAMPLE: AURA1200-SPD4OBF

PREFIX	INSTALLATION	DISTRIBUTION	CCT	OPTIC/DIFFUSER	FINISH	DRIVER/CONTROLS
AURA1200 -	SP suspended	D direct DI direct/indirect	4 4000K	O opal	W white B black g grey	F fixed output D DALI