

LUNA – LINEAR

LUNA is an elegant profile meticulously crafted to illuminate passageways, staircases, and features. With its carefully designed structure, LUNA offers soft, reflected light, ensuring minimal glare.

FEATURES


- Recessed/wall-mounted
- Soft reflected light distribution
- 3000K, 4000K, tunable white, dim to warm and RGBW
- CRI90
- Low-glare cover options
- Extruded aluminium channel
- Anodised profile finish
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard
- 7 year warranty



SPECIFICATION

Colour Temperature CCT	3000K 4000K TW D2W RGBW
Installation	Recessed
Distribution	Direct
Diffuser	Opal Clear
Efficacy	Up to 130 lm/W
CRI	90
Controls	Fixed Output DALI Casambi
Finish	Anodised
Dimensions	H 80 mm x W 17 mm
Standard Lengths	1000 mm 2005 mm Custom
Operating Voltage	24V
LED Light Source Power	4.8W - 24W
Material	Aluminium
LED Light Source	Max. W 11.2 mm
Ingress Protection	IP20
Lifetime	50,000hrs
Operating Temperature	-25°C ~ 45°C
Conformity	No UV or IR Emissions, UKCA
Warranty	7 Years
Notes	*Custom lengths available on request, LED light source and lumen efficiency may vary.

DIMENSIONS

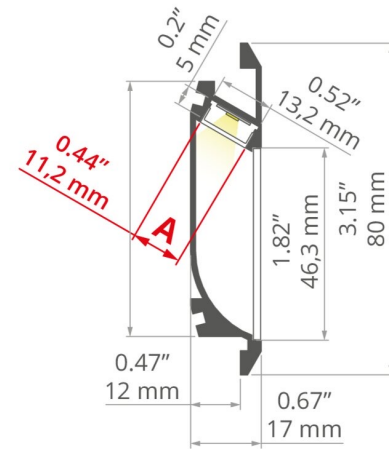

COVER OPTIONS



PRODUCT ORDER CODE

EXAMPLE: LUNA-RD3OAF1000

PREFIX	INSTALLATION	DISTRIBUTION	CCT	DIFFUSER	FINISH	DRIVER	LENGTH
LUNA -	R recessed	D direct	3 3000K	O frosted opal	A anodised aluminium	F fixed output	1000 1000 mm
			4 4000K	C clear			2005 2005 mm
			TW tunable white				--- custom length*
			D2W dim2warm				
			RGBW red/green/blue/white				

COMPONENTS



O
opal diffuser



C
clear



A
anodised finish



EC
closed end cap



KMA SPRING
mounting fastener



ZM-NA-180
connector