





KOPRO – MICRO LINEAR

The KOPRO lighting system is engineered for seamless 30° corner integration. The low profile and cable management space allows for versatile installations into corners and under-cabinet areas.

FEATURES


- Seamless corner design
- Standard and custom lengths
- 3000K, 4000K, tunable white, dim to warm and RGBW
- High lumen efficacy up to 130 lm/W
- CRI90+
- Low-glare polycarbonate diffuser - curved or straight
- Dedicated custom components
- Extruded anodised aluminium channel
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard
- 7 year warranty

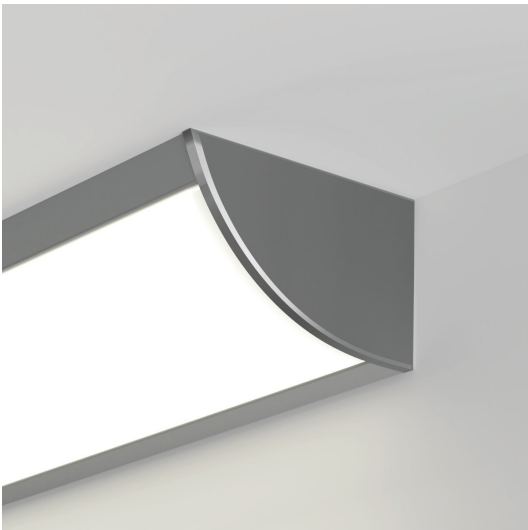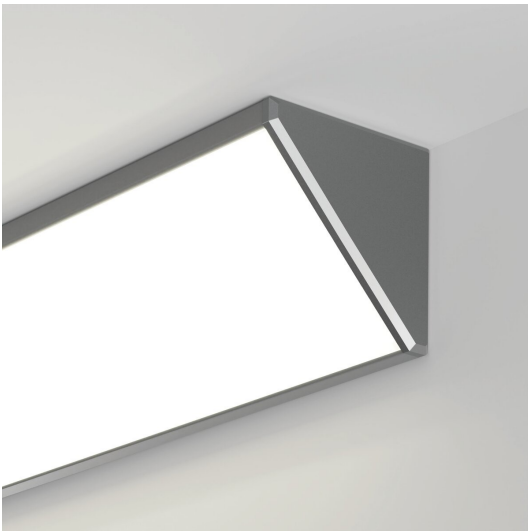


SPECIFICATION

| | |
|------------------------|---|
| Colour Temperature CCT | 3000K 4000K TW D2W RGBW |
| Installation | Surface |
| Distribution | Direct |
| Diffuser | Opal |
| Efficacy | Up to 130 lm/W |
| CRI | 90 |
| Controls | Fixed Output DALI Casambi |
| Finish | Anodised |
| Dimensions | W 44.6 mm x H 27.2 mm |
| Standard Lengths | 1000 mm 2005 mm 3010 mm Custom |
| Operating Voltage | 24V |
| LED Light Source Power | 4.8W - 24W |
| Material | Aluminium |
| LED Light Source | Max. W 11 mm x 2 |
| Ingress Protection | IP20 |
| Lifetime | 50,000hrs |
| Operating Temperature | -25°C ~ 45°C |
| Conformity | No UV or IR Emissions, UKCA |
| Warranty | 7 Years |
| Notes | *Custom lengths available on request, LED light source and lumen efficiency may vary. |


DIMENSIONS

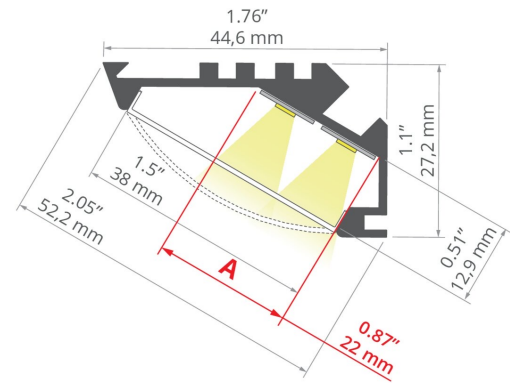

PHOTOMETRY



Opal Diffuser



Clear Diffuser

PRODUCT ORDER CODE

EXAMPLE: KOPRO-S4OFA2005

| PREFIX | INSTALLATION | CCT | DIFFUSER | DRIVER | FINISH | LENGTH |
|----------------|---------------------|-------------------------------------|--------------------------|--------------------------|--------------------------------|------------------------|
| KOPRO - | S surface | 3 3000K | O frosted opal | F fixed output | A anodised aluminium | 1000 1000 mm |
| | | 4 4000K | | D DALI | | 2005 2005 mm |
| | | TW tunable white | | C casambi | | 3010 3010 mm |
| | | D2W dim2warm | | | | --- custom length* |
| | | RGBW red/green/blue/white | | | | |

COMPONENTS



O
opal diffuser
straight



O
opal diffuser
curved



A
anodised finish



EC
closed end cap
straight



EC
closed end cap
curved