



KLUS Inspiring Solutions

KOZUS – MICRO LINEAR

The KOZUS lighting system is engineered for seamless integration, designed to mount effortlessly on 16 mm (0.63") drywall. This system allows for versatile installation in corners without any collision with the ceiling structure. The line of light is expertly designed to be flush with the surface, with non-visible aluminium elements enhancing its overall aesthetic.


FEATURES

- Seamless design
- Standard and custom lengths
- Direct lighting distribution
- 3000K, 4000K, tunable white, dim to warm and RGBW
- High lumen efficacy up to 130 lm/W
- CRI90+
- Low-glare polycarbonate diffuser
- Dedicated custom components
- Extruded anodised aluminium channel
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard
- 7 year warranty


SPECIFICATION

Colour Temperature CCT	3000K 4000K TW D2W RGBW
Installation	Recessed
Distribution	Direct
Diffuser	Opal Clear
Efficacy	Up to 130 lm/W
CRI	90
Controls	Fixed Output DALI Casambi
Finish	Anodised
Dimensions	W 26.8 mm x H 17.5 mm
Standard Lengths	1000 mm 2005 mm 3010 mm Custom
Operating Voltage	24V
LED Light Source Power	4.8W - 24W
Material	Aluminium
LED Light Source	Max. W 8 mm x 2
Ingress Protection	IP20
Lifetime	50,000hrs
Operating Temperature	-25°C ~45°C
Conformity	No UV or IR Emissions, UKCA
Warranty	7 Years
Notes	*Custom lengths available on request, LED light source and lumen efficiency may vary.


DIMENSIONS

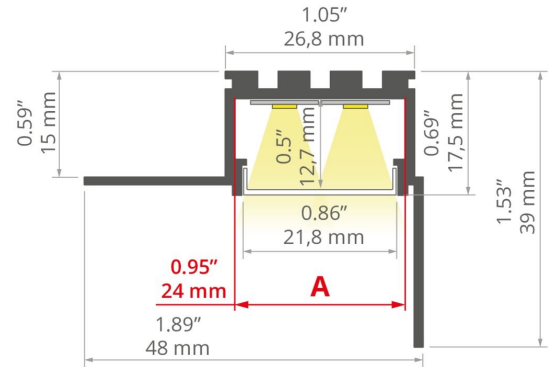

PHOTOMETRY



Opal Diffuser



Clear Diffuser

PRODUCT ORDER CODE

EXAMPLE: KOZUS-R4OAF2005

PREFIX	INSTALLATION	CCT	DIFFUSER	FINISH	DRIVER	LENGTH
KOZUS -	R recessed	3 3000K	O frosted opal	A anodised aluminium	F fixed output	1000 1000 mm
		4 4000K	C clear		D DALI	2005 2005 mm
		TW tunable white			C casambi	3010 3010 mm
		D2W dim2warm				--- custom length*
		RGBW red/green/blue/white				


COMPONENTS



O
opal diffuser



C
clear



A
anodised finish



EC
closed end cap



MP-22
masking cover



TECH-22
protective insert



ZM-NA-90
connector



ZM-NA-PION-120
connector