



## LINE – MICRO LINEAR

LINE is a contemporary linear lighting system that revolutionises interior illumination by employing a single steel bar to elegantly house an LED light source. This innovative design concept not only achieves a sleek and seamless aesthetic but also ensures optimal lighting performance throughout any interior environment.


### FEATURES

- Standard and custom lengths up to 6m
- Direct and indirect lighting distribution
- 3000K, 4000K, tunable white, dim to warm and RGBW
- High lumen efficacy up to 130 lm/W
- CRI90+
- Dedicated custom installation components
- Secure steel holding bare
- Suitable for installation into brick walls, wooden walls and drywalls
- Black finish
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard
- 5 year warranty


## SPECIFICATION

Colour Temperature CCT	3000K   4000K   TW   D2W   RGBW
Installation	Surface/wall
Distribution	Direct   Indirect
Light source	LED
Efficacy	Up to 130 lm/W
CRI	90
Controls	Fixed Output   DALI   Casambi
Finish	Black RAL9006
Lengths	Up to 6000 mm
Operating Voltage	24V
LED Light Source Power	4.8W - 24W
Material	Steel
Ingress Protection	IP20
Components	Surface/wall Fixing Brackets
Lifetime	50,000hrs
Operating Temperature	-25°C ~45°C
Conformity	No UV or IR Emissions, UKCA
Warranty	5 Years
Notes	*Custom lengths available on request, LED light source and lumen efficiency may vary.


## APPLICATION

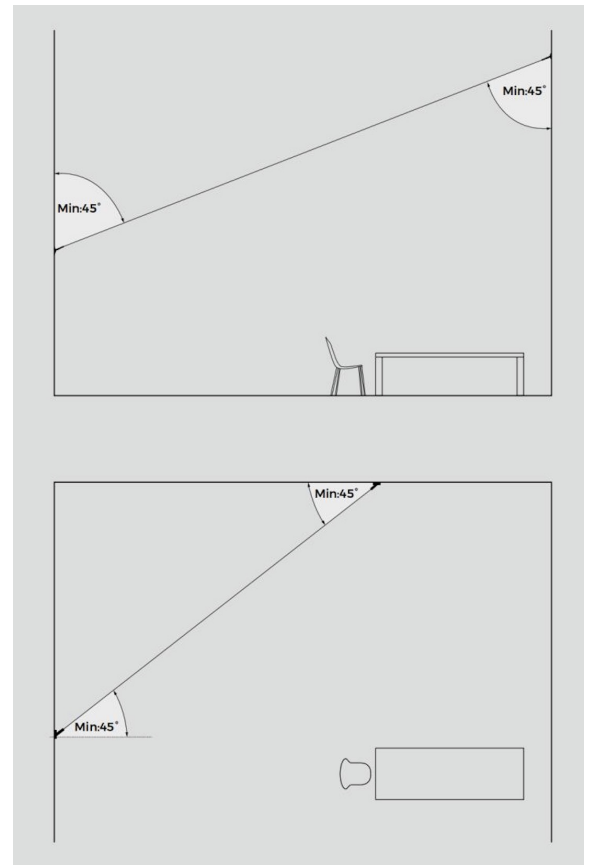

## PHOTOMETRY

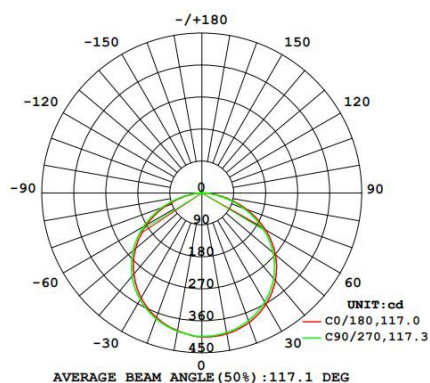

## INSTALLATION

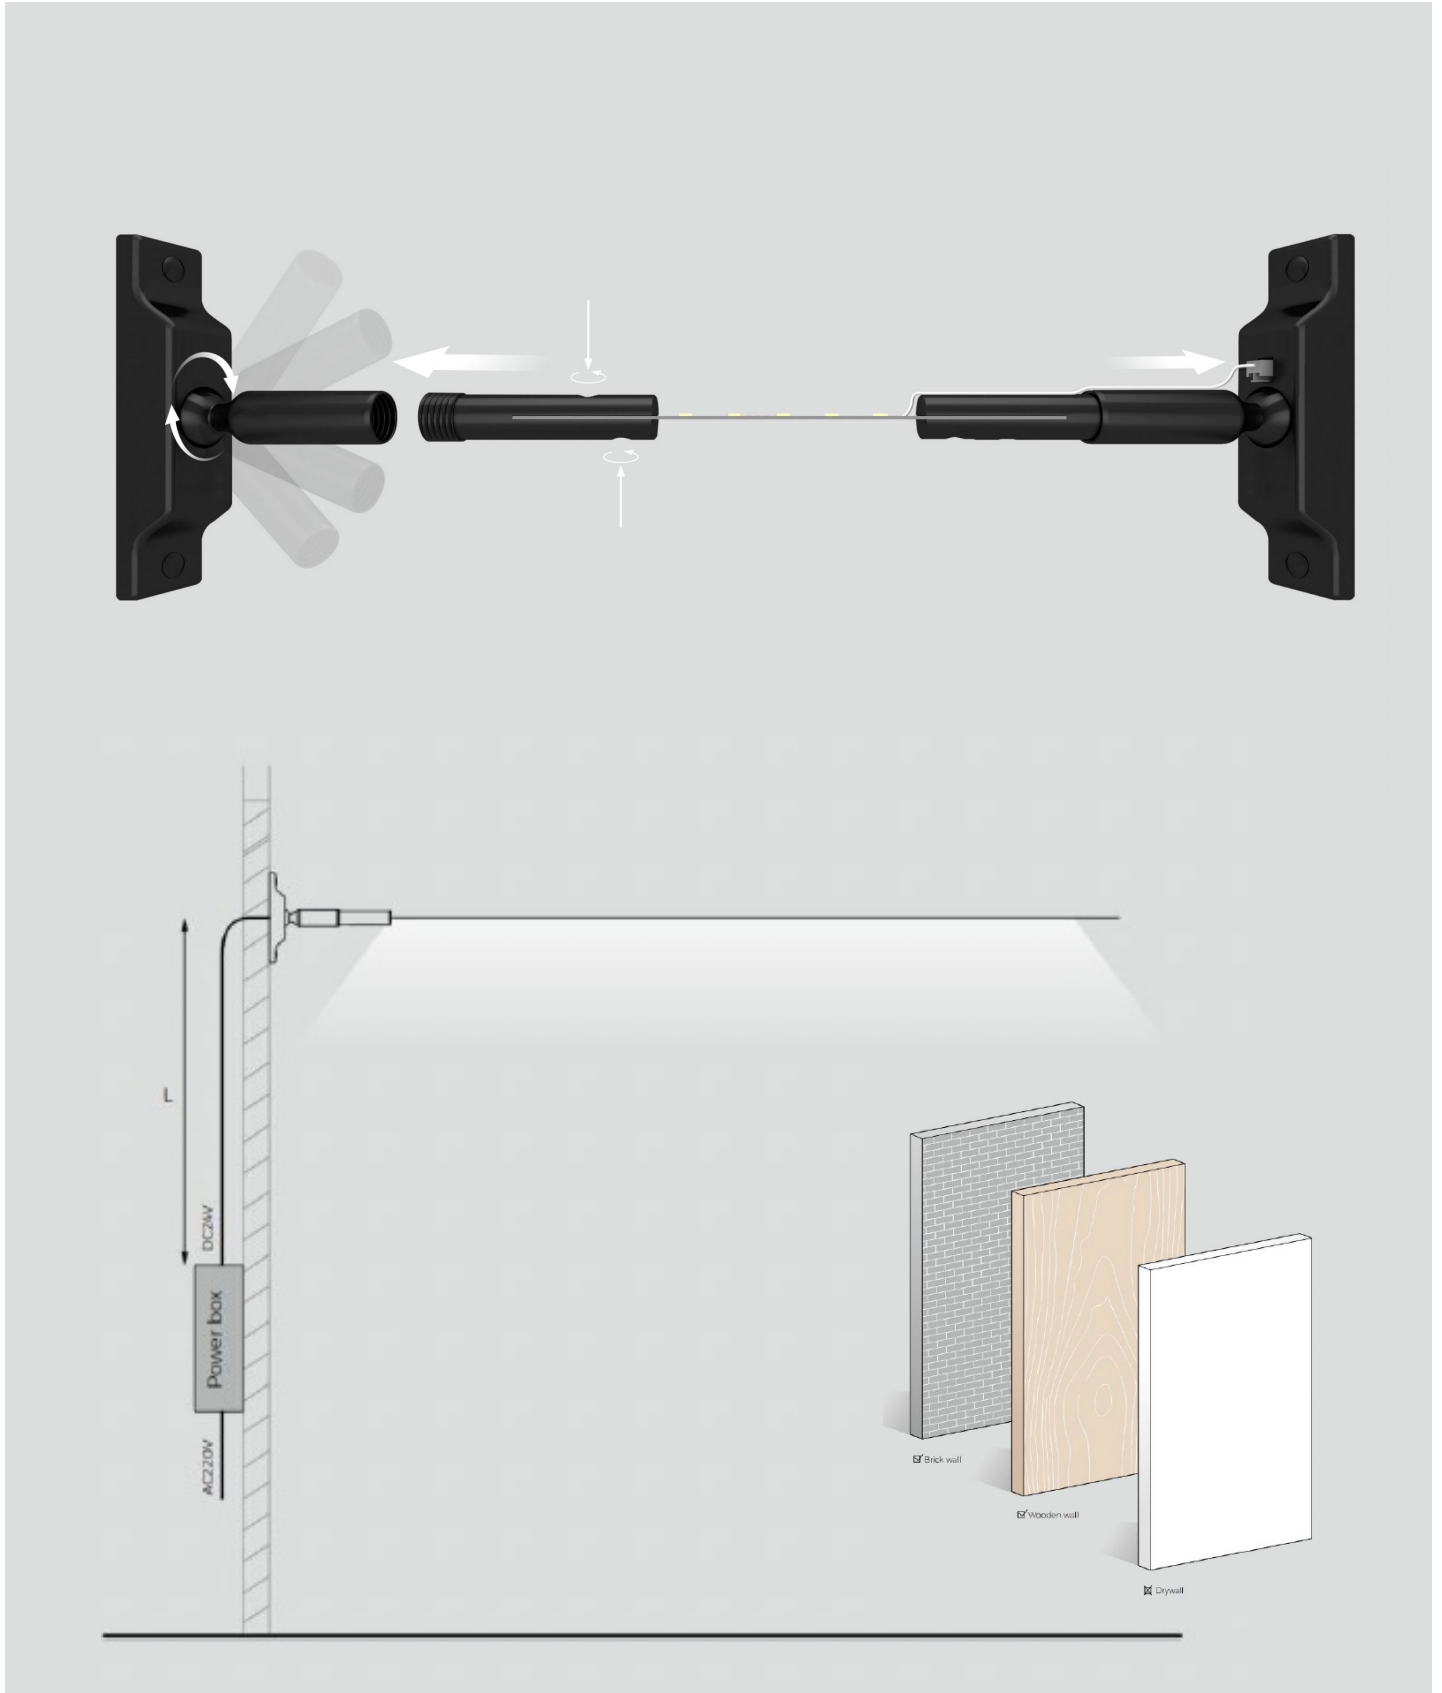

PRODUCT ORDER CODE

EXAMPLE: LINE-S3BD5000

PREFIX	INSTALLATION	CCT	FINISH	DRIVER	LENGTH
LINE -	S surface	<b>3</b> 3000K	<b>B</b> black	<b>F</b> fixed output	<b>1000</b> 1000 mm
		<b>4</b> 4000K		<b>D</b> DALI	2000 2000 mm
		<b>TW</b> tunable white		<b>C</b> casambi	3000 3000 mm
		<b>D2W</b> dim2warm			---
		<b>RGBW</b> red/green/blue/white			custom length*

