



OREO – SUSPENDED PENDANT

OREO is a powerful and elegant circular luminaire. Its design features a circular die-cast aluminium form with a black or white finish that fits harmoniously into the surrounding architecture.

The glare-free microprismatic optic ensures optimal working light with high visual comfort - UGR19.

FEATURES

- Ø900 mm
- Efficacy up to 123 lm/W
- Direct and indirect light distribution
- Glare-free diffuser for consistent illumination
- UGR>19
- Suspended via rod or wire
- CRI80
- Compact driver
- DALI dimming options
- High quality aluminium body
- Black, white finish
- Plug-and-play wiring for quick installation
- IP40 as standard
- 5 year warranty


SPECIFICATION

Colour Temperature CCT	2700K 3000K 4000K
Power	68W (+ 28W with indirect)
Luminous Flux	Up to 8400 lm @4k 68W
Efficacy	Up to 123 lm/W
CRI	80
Controls	Fixed Output DALI
Diffuser	Microprismatic
UGR	>19
MacAdam Ellipse	3
Distribution	Direct Direct/Indirect
Beam Angle	90° direct / 110° indirect
Finish - Outside	Black RAL9005 White RAL 9016
Finish - Inside	Black White Gold
Dimensions	Ø900 mm x H 50 mm
Operating Voltage	46V 1400mA
Material	Aluminium
Installation	Suspension Wire Suspension Rod
Ingress Protection	IP40
Lifetime	50,000hrs L80B10
Operating Temperature	-25°C ~35°C
Weight	14.6 kg (wire) 14.9 kg (rod)
Conformity	No UV or IR Emissions, UKCA
Warranty	5 Years

DIMENSIONS



PHOTOMETRY

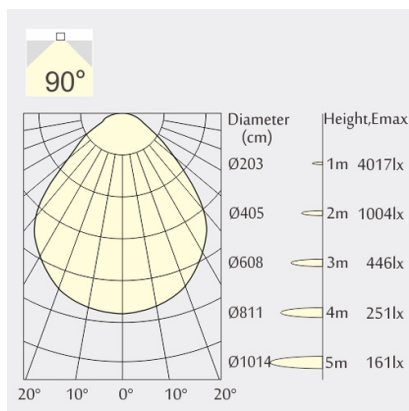

68W 4000K Ø900 mm

PRODUCT ORDER CODE

EXAMPLE: OREO900-SPD1427OWWF

PREFIX	INSTALLATION	DISTRIBUTION	POWER	CCT	OPTIC	FINISH/OUTSIDE	FINISH/INSIDE	DRIVERCONTROLS			
OREPO900 -	SP suspended wire 1200mm	D direct	68 68W	27 2700K	O opal	W white	W white	F fixed output			
	SP1 suspended rod 1000mm	DI direct/indirect		3 3000K					B black	B black	D DALI
				4 4000K							

