



PIKO – MICRO LINEAR

The PIKO is a sleek decorative luminaire, delivering a clean line of illumination. It offers dedicated mounting fixtures for both suspension and surface installation, providing flexibility for creative custom setups. With its contemporary design, the PIKO is perfectly suited for architectural, residential, and office applications.


FEATURES

- W 10 mm x H 7 mm
- Standard and custom lengths
- Direct lighting distribution
- 3000K, 4000K, tunable white, dim to warm and RGBW
- High lumen efficacy up to 130 lm/W
- CRI90+
- Low-glare polycarbonate diffuser
- Dedicated custom components
- Extruded aluminium channel
- Custom bending of the extrusion
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard, IP67 on request
- 7 year warranty


SPECIFICATION

Colour Temperature CCT	3000K 4000K TW D2W RGBW
Installation	Suspended Surface
Distribution	Direct
Diffuser	Opal Clear
Efficacy	Up to 130 lm/W
CRI	90
Controls	Fixed Output DALI Casambi
Finish	Anodised Black
Dimensions	W 10 mm x H 7 mm
Standard Lengths	1000 mm 2005 mm 3010 mm Custom
Operating Voltage	24V
LED Light Source Power	4.8W - 24W
Material	Aluminium
LED Light Source	Max. W 7 mm
Bending Radius - Inside	150 mm
Bending Radius - Outward	150 mm
Ingress Protection	IP20 IP67
Lifetime	50,000hrs
Operating Temperature	-25°C ~45°C
Conformity	No UV or IR Emissions, UKCA
Warranty	7 Years
Notes	*Custom lengths available on request, LED light source and lumen efficiency may vary.


DIMENSIONS

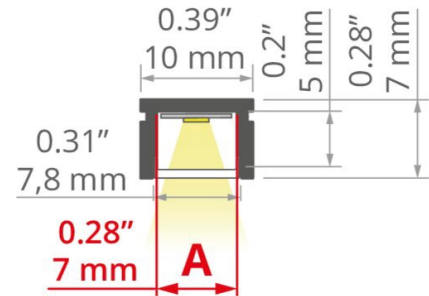

PHOTOMETRY



Opal Diffuser



Clear Diffuser

PRODUCT ORDER CODE

EXAMPLE: PIKO-SP3OAF1000

PREFIX	INSTALLATION	CCT	DIFFUSER	FINISH	DRIVER	LENGTH	
PIKO-	SP suspended	3 3000K	O frosted opal	A anodised aluminium	F fixed output	1000 1000 mm	
	S surface	4 4000K	C clear	B black	D DALI	2005 2005 mm	
		TW tunable white				C casambi	3010 3010 mm
		D2W dim2warm					--- custom length*
RGBW red/green/blue/white							

COMPONENTS



O
opal diffuser



C
clear



A
anodised finish



B
black



EC
closed end cap



S
surface mounting
clip



SP
suspension clip
wire/rod