




POKET – MICRO LINEAR

The POKET lighting system is engineered for seamless integration and designed to mount effortlessly on 12.5 mm drywall. This system boasts a concealed light source, making it perfect for illuminating linear galleries, stages, or exhibitions with a subtle and ambient glow.

FEATURES

- Seamless design
- Hidden light source
- Standard and custom lengths
- 50° lighting distribution
- 3000K, 4000K, tunable white, dim to warm and RGBW
- High lumen efficacy up to 130 lm/W
- CRI90+
- Low-glare polycarbonate diffuser
- Dedicated custom components
- Extruded anodised aluminium channel
- Compact driver
- DALI dimming and Casambi controls
- Plug-and-play wiring for quick installation
- IP20 as standard
- 7 year warranty


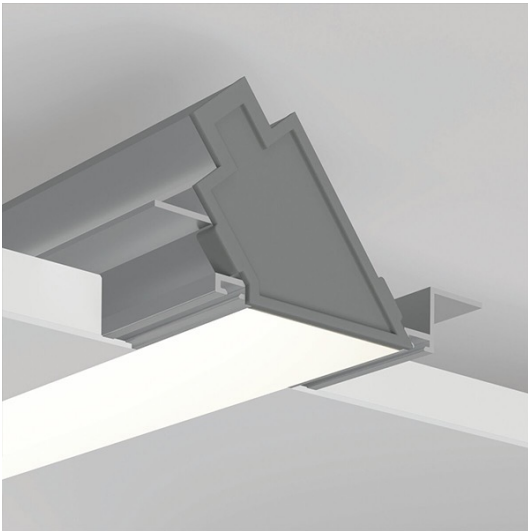


KLUS Inspiring Solutions

SPECIFICATION

Colour Temperature CCT	3000K 4000K TW D2W RGBW
Installation	Recessed
Distribution	Direct 50°
Diffuser	Opal Clear
Efficacy	Up to 130 lm/W
CRI	90
Controls	Fixed Output DALI Casambi
Finish	Anodised White
Dimensions	W 90.7 mm x H 44.1 mm
Standard Lengths	1000 mm 2005 mm 3010 mm Custom
Operating Voltage	24V
LED Light Source Power	4.8W - 24W
Material	Aluminium
LED Light Source	Max. W 12 mm
Ingress Protection	IP20
Lifetime	50,000hrs
Operating Temperature	-25°C ~45°C
Conformity	No UV or IR Emissions, UKCA
Warranty	7 Years
Notes	*Custom lengths available on request, LED light source and lumen efficiency may vary.

DIMENSIONS

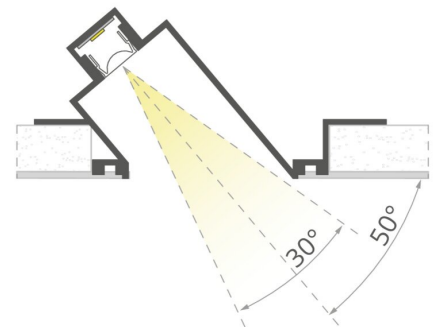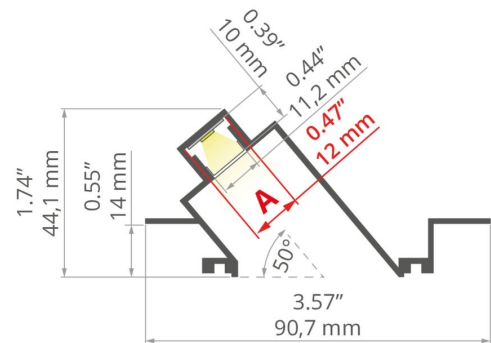

PRODUCT ORDER CODE

EXAMPLE: POKET-R4OAF2005

PREFIX	INSTALLATION	CCT	DIFFUSER	FINISH	DRIVER	LENGTH
POKET -	R recessed	3 3000K	O frosted opal	A anodised aluminium	F fixed output	1000 1000 mm
		4 4000K	C clear	W white	D DALI	2005 2005 mm
		TW tunable white			C casambi	3010 3010 mm
		D2W dim2warm				--- custom length*
		RGBW red/green/blue/white				

COMPONENTS

