

## FINN – Wall Mounted

The FINN has a simple yet sophisticated style and soft bidirectional illumination which makes it suitable for vertical or horizontal mounting in a wide range of decorative interior applications.


### FEATURES

- 400 mm x 110mm x 81mm
- Efficacy up to 96 lm/W
- Bidirectional light distribution
- Opal acrylic diffusers for homogenous illumination
- UGR>19
- Wall mounted
- CRI80
- Integral LED driver
- Short circuit, overload and temperature protection
- Black, white finish and custom colours
- IP20 as standard
- 5 year warranty


## SPECIFICATION

Colour Temperature CCT	3000K   4000K
Power	9 W   16W   24W
Luminous Flux	800 -2250 Lumens
Efficacy	Up to 96 lm/W
CRI	80
Controls	Fixed Output   DALI   SwitchDim
Diffuser	Opal
UGR	>19
Distribution	Direct   Indirect
Finish	White   Black   RAL
Dimensions	400 mm x 110mm x 81mm
Operating Voltage	220-240V
Material	Aluminium
Installation	Wall Mounted (vertical/horizontal)
Ingress Protection	IP20
Lifetime	50,000hrs
Operating Temperature	-25°C ~35°C
Weight	1.4 kg
Conformity	Thermal management system No UV or IR Emissions, UKCA
Warranty	5 Years

## DIMENSIONS

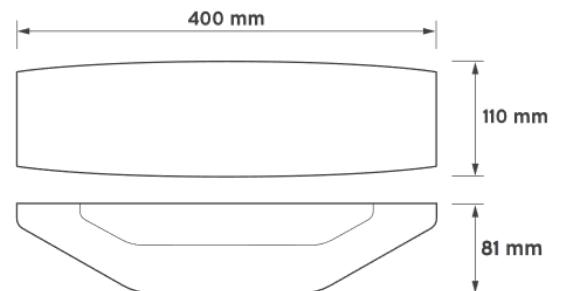

## PHOTOMETRY

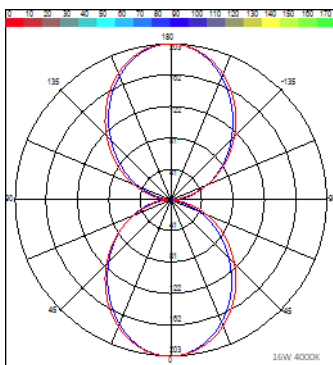

PRODUCT ORDER CODE

EXAMPLE: FINN-SD93BD

PREFIX	INSTALLATION	DISTRIBUTION	POWER	CCT	FINISH	DRIVER/CONTROLS	EMERGENCY
FINN	S surface	D direct	9 9W	3 3000K	W white	F fixed output	SE Standard emergency
		DI direct/indirect	16 16W	4 4000K	B black	S Switchdim	DE Dali emergency
			24 24W		RAL Custom colour	D DALI	