



## LUNA 600 – SUSPENDED PENDANT

Our LUNA pendant range features a circular die-cast aluminium form that fits harmoniously into the surrounding architecture. Its glare-controlled opal optic delivers soft, natural and uniform light. Available in a 600 mm diameter and finished in black, white or grey.


### FEATURES

- Ø600 mm
- Efficacy up to 91 lm/W
- Opal diffuser for consistent illumination
- UGR>22
- Suspended wire installation
- CRI80
- Compact driver and DALI dimming options
- High quality aluminium body
- Black, white or grey finish
- Plug-and-play wiring for quick installation
- IP20 as standard
- 5 year warranty

## SPECIFICATION

|                        |   |
|------------------------|---|
| Colour Temperature CCT | 4000K   |
| Power                  | 52W   |
| Luminous Flux          | Up to 4775 lm @4k   |
| Efficacy               | Up to 91 lm/W   |
| CRI                    | 80  |
| Controls               | Fixed Output   DALI   |
| Diffuser               | Opal  |
| UGR                    | >22   |
| MacAdam Ellipse        | 3   |
| Distribution           | Direct  |
| Finish                 | Black RAL9005   White RAL 9016   Grey RAL 9006   Custom RAL |
| Dimensions             | Ø600 mm x H 105 mm  |
| Operating Voltage      | 220-240V 50/60Hz  |
| Material               | Aluminium   |
| Installation           | Suspension Wire 1.4m  |
| Power Factor           | >0.9  |
| Ingress Protection     | IP20  |
| Lifetime               | 50,000hrs   |
| Operating Temperature  | -10°C ~25°C   |
| Weight                 | 6.5 kg  |
| Conformity             | No UV or IR Emissions, UKCA                                 |
| Warranty               | 5 Years   |

## DIMENSIONS

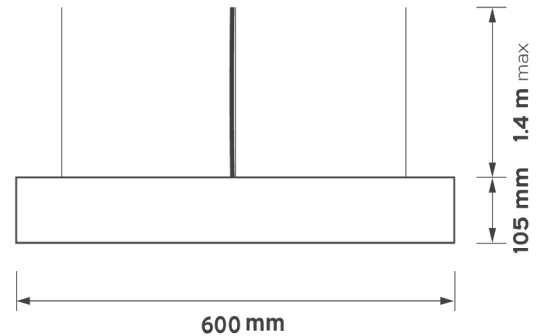

## OPTIONS



PRODUCT ORDER CODE

EXAMPLE: LUNA600-SPD514OWD

| PREFIX           | INSTALLATION           | DISTRIBUTION       | POWER            | CCT               | OPTIC            | FINISH  | CONTROLS   |
|------------------|------------------------|--------------------|------------------|-------------------|------------------|---|--|
| <b>LUNA600 -</b> | <b>SP</b><br>suspended | <b>D</b><br>direct | <b>52</b><br>52W | <b>4</b><br>4000K | <b>O</b><br>opal | <b>W</b><br>white<br><br><b>B</b><br>black<br><br><b>G</b><br>grey<br><br><b>RAL</b><br>custom RAL colour | <b>F</b><br>fixed output<br><br><b>D</b><br>DALI |

