




PLAIN

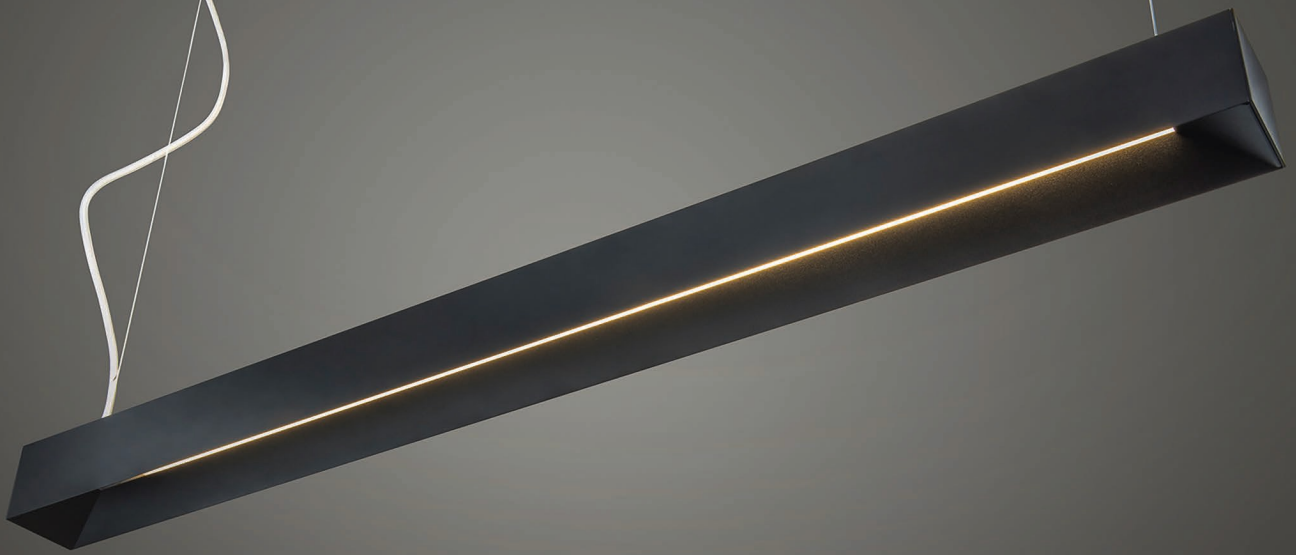



## ELEGANCE OF SIMPLICITY

PLAIN is a linear lighting solution with a Nordic flair that achieves a harmonious balance between functionality and aesthetics.

This suspended direct/indirect luminaire emits a medium beam downward and a wide beam upward, enhancing the ambiance of any space. The latest version introduces new features, including a beautiful bronze colour finish, modular optics designed for office environments, sensors, and integrated lighting controls.

It's simple yet elegant design is the perfect addition to any contemporary interior space.

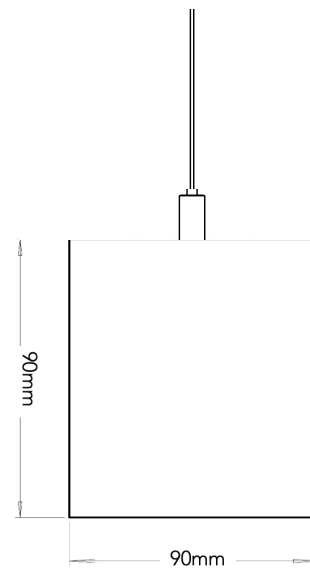

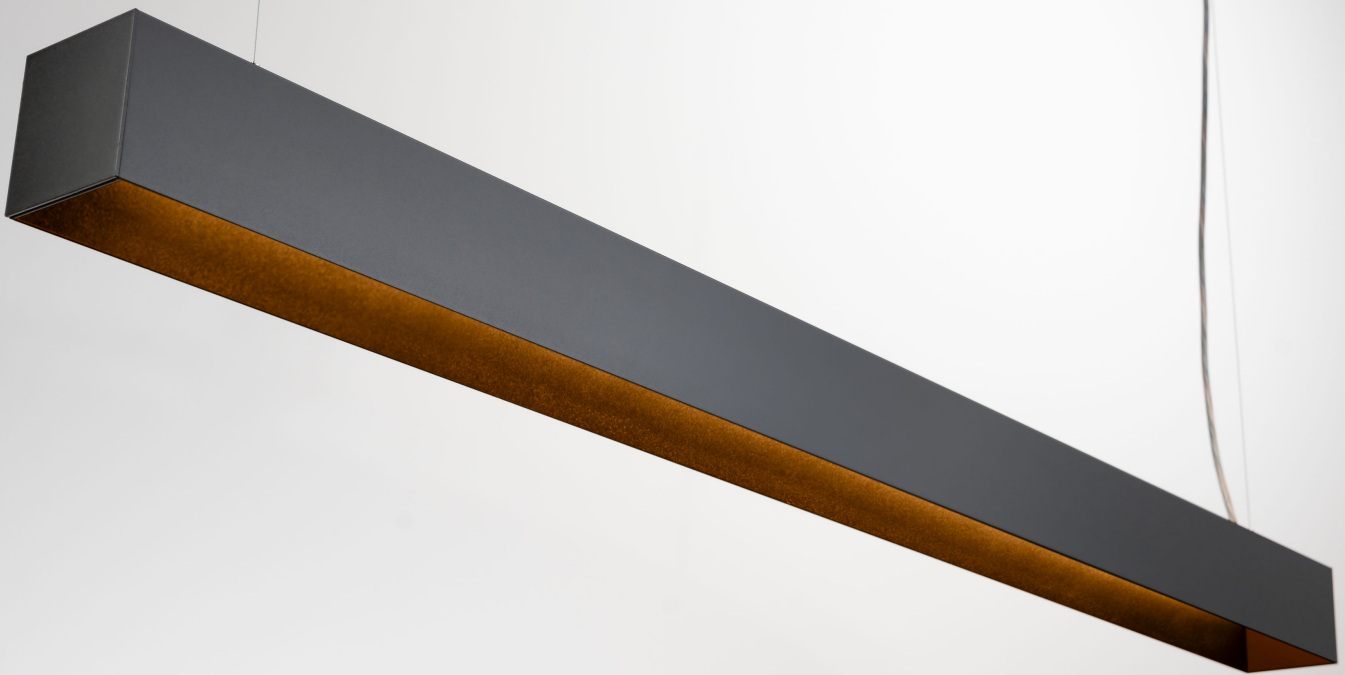

## FEATURES

- 2700K | 3000K | 4000K | 5000K | TW (2700~5000K)
- CRI80 | CRI90
- Fixed output | SwitchDim | DALI
- Opal | Prismatic optic
- Direct | Direct/Indirect
- Efficacy up to 130 lm/W
- McAdam Step < 3
- UGR >16
- Profile 90 mm x 90 mm
- Standard lengths 1300 mm | 1600 mm
- Standard suspension kit 1.5m
- Standard power cable 2m
- Extruded aluminium
- L80B20 @ 100,000 hrs
- IP20
- IK02

## FINISH

- White RAL9016 matt fine texture
- Black RAL9005 matt fine texture
- Bronze matt fine texture
- Custom RAL colour finish


## OPTIONS

- CRI97 for office interiors
- Modular optics
- Casambi controls
- Continues systems
- Manual pull switch
- Presence sensors

## LIGHT DISTRIBUTION



**Direct**  
Opal or PMMA diamond prism



**Direct/Indirect**  
Opal



PRODUCT ORDER CODE

EXAMPLE: PLAIN-SPDIE3OBD1300


PREFIX	INSTALLATION	DISTRIBUTION	OUTPUT	CCT
<b>PLAIN -</b>	<b>SP</b> suspended	<b>D</b> direct	<b>E</b> high efficiency	<b>27</b> 2700K
		<b>DI</b> direct/indirect	<b>O</b> high output	<b>3</b> 3000K
				<b>4</b> 4000K
				<b>5</b> 5000K
				<b>TW</b> tunable white
DIFFUSER/OPTIC	FINISH	DRIVER	OPTIONS	LENGTH
<b>O</b> opal	<b>W</b> white RAL 9016	<b>F</b> fixed output	<b>PIR</b> motions sensor	<b>1300</b> 1300 mm
<b>P</b> prismatic	<b>B</b> black RAL 9005	<b>D</b> DALI	<b>s</b> pull switch	<b>1600</b> 1600 mm
<b>M</b> modular	<b>BR</b> bronze	<b>S</b> switchdim		--- custom length*
<b>O</b> office	<b>RAL</b> custom RAL colour	<b>C</b> casambi		
<b>B</b> office basic				



Opal




Prismatic




Modular



Office



Basic Office

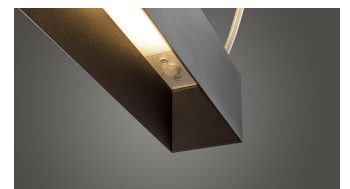

Motion Sensor



Pull switch

## SUSPENDED - DIRECT



LENGTH	DISTRIBUTION	OUTPUT	POWER	CCT	CRI	LUMENS	WEIGHT
1300 mm	Direct	High Efficiency	27W	4000K	80	2722	4.8
1600 mm	Direct	High Efficiency	32W	4000K	80	3382	5.9
1300 mm	Direct	High Output	36W	4000K	80	3630	4.8
1600 mm	Direct	High Output	45W	4000K	80	4550	5.9

## SUSPENDED - DIRECT / INDIRECT





LENGTH	DISTRIBUTION	OUTPUT	POWER	CCT	CRI	LUMENS-DIRECT	LUMENS-INDIRECT	WEIGHT
1300 mm	Direct/indirect	High Efficiency	50W	4000K	80	2722	3523	4.8
1600 mm	Direct/indirect	High Efficiency	60W	4000K	80	3382	4379	5.9
1300 mm	Direct/indirect	High Output	70W	4000K	80	3630	5015	4.8
1600 mm	Direct/indirect	High Output	88W	4000K	80	4550	4890	5.9





IMPACT LIGHTING SOLUTIONS

 [www.impactlightingsolutions.com](http://www.impactlightingsolutions.com)

 01865 989 830

 [sales@impactls.com](mailto:sales@impactls.com)