

## SOL – ANTI-LIGATURE LUMINIARE

Our SOL luminaire is engineered to endure challenging conditions, demonstrating resilience against moisture and high-impact scenarios. On correct installation with security screws the SOL can attain anti-ligature status. The impact modified polycarbonate diffuser provides excellent photometric performance. The robust aluminium structure houses a gear tray, electronic driver, and multi-circuit LED board, ensuring protection to IP65/IK10 standards.


### FEATURES

- Anti-ligature design
- High performance opal diffuser
- Efficacy up to 132 lm/W @4000K - CRI80
- Glow-wire tested
- TP(a) certified
- Security screws available
- Surface/wall installation
- 1.2mm aluminium base
- Impact modified polycarbonate diffuser
- UV stabiliser properties
- Compact driver DALI dimming options
- Neoprene gasket to ensure IP65 ingress protection
- Robust IK10 impact rating
- 5 year warranty

## SPECIFICATION

Colour Temperature CCT	3000K   4000K		
Power	15.4W	21.5W	27.3W
Luminous Flux @4k Opal	2034 lm	2822 lm	3478 lm
Efficacy	132 lm/W	131 lm/W	127 lm/W
Power Factor	0.934	0.962	0.974
Current	500 mA	700 mA	900 mA
CRI	80		
Optic	Opal 114°		
Controls	Fixed Output   DALI		
Finish	White		
Dimensions	Ø371 mm x D 110 mm		
Operating Voltage	220-240V 50Hz		
Material	Aluminium/Polycarbonate		
Components	Security Screws/Neoprene Gasket		
Installation	Surface/Wall		
Emergency Available	Standard   DALI		
Ingress Protection	IP65		
Impact Rating	IK10		
Lifetime	50,000hrs		
Operating Temperature	-25°C ~35°C		
Conformity	No UV or IR Emissions, UKCA, UV stabilized		
Warranty	5 Years		

## DIMENSIONS

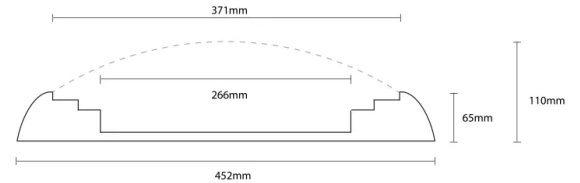

PRODUCT ORDER CODE

EXAMPLE: SOL-S214OWF371SE

PREFIX	INSTALLATION	POWER	CCT	OPTIC/DIFFUSER
<b>SOL-</b>	<b>S</b> surface/wall	<b>15</b> 15.4W	<b>3</b> 3000K	<b>O</b> opal
		<b>21</b> 21.5W		
		<b>27</b> 27.3W		

FINISH	DRIVER	DIMENSIONS	EMERGENCY	OPTIONS
<b>W</b> white	<b>F</b> fixed output	<b>371</b> Ø371 x 110	<b>SE</b> standard emergency	
	<b>D</b> DALI		<b>DE</b> DALI emergency	