


SUB 2 – AMENITIY LUMINIARE

Our SUB 2 luminaires, provides a contemporary and durable lighting solutions for walkways, tunnels, storage areas, and car parks.

The high-performance impact modified polycarbonate diffuser that eliminates glare and hotspots, achieving a remarkable 92% increase in LOR for excellent photometric performance. The robust aluminium structure houses a gear tray, electronic driver, and multi-circuit LED board, ensuring protection to IP65/IK10 standards.

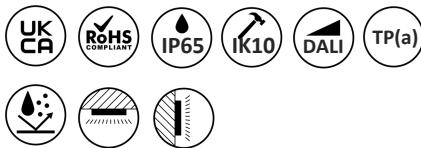


FEATURES

- Clear prismatic or high performance opal diffuser
- Efficacy up to 125 lm/W @4000K
- CRI80
- Glow-wire tested
- TP(a) certified
- Surface/wall installation
- UV stabiliser properties
- 3 x 20mm conduit entry points
- Impact modified polycarbonate diffuser
- Aluminium base
- Compact driver DALI dimming options
- Hinged gear tray for easy maintenance
- IP65 ingress protection
- Robust IK10 impact rating
- 5 year warranty

SPECIFICATION

Colour Temperature CCT	3000K 4000K
Power	20.5W
Luminous Flux @4k Opal	2566 lm
Efficacy	125 lm/W
Power Factor	0.943
Current	900 mA
CRI	80
Optic	Opal 114°
Controls	Fixed Output DALI
Finish	Black White
Dimensions	W 276 mm x L 276 mm x D 97 mm
Operating Voltage	220-240V 50Hz
Material	Aluminium/Polycarbonate
Installation	Surface/Wall
Emergency Available	Standard DALI
Ingress Protection	IP65
Impact Rating	IK10
Lifetime	50,000hrs
Operating Temperature	-25°C ~35°C
Conformity	No UV or IR Emissions, UKCA, UV stabilized
Warranty	5 Years

DIMENSIONS

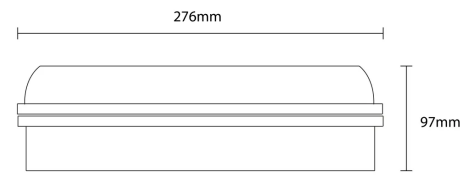

OPTIONS



OPAL - BLACK



CLEAR - BLACK



OPAL - WHITE



CLEAR - WHITE

PRODUCT ORDER CODE

EXAMPLE: SUB2-S204CBF276

PREFIX	INSTALLATION	POWER	CCT	OPTIC/DIFFUSER
SUB2-	S surface/wall	20 20.5W	3 3000K 4 4000K	O opal C clear prismatic

FINISH	DRIVER	DIMENSIONS	EMERGENCY	OPTIONS
B black	F fixed output	276 276 x 97 mm	SE standard emergency	
W white	D DALI		DE DALI emergency	