

SUMMIT - AMENTIY LUMINIARE

The SUMMIT luminaire provides an attractive and durable lighting solutions for both interior and exterior applications, such as walkways, corridors and open office areas.

Featuring a high-performance polycarbonate diffuser, effectively eliminates glare to ensuring excellent photometric performance. Housed within a robust polycarbonate base, each luminaire accommodates a gear tray, electronic driver, and multi-circuit LED board.


FEATURES

- Efficacy up to 132 lm/W @4000K
- CRI80
- Glow-wire tested
- TP(a) certified
- Surface/wall installation
- Indirect component available with halo effect
- Impact modified polycarbonate diffuser and base
- Anti-tamper screws available
- UV stabiliser properties
- Compact driver and DALI dimming options
- Hinged gear tray for easy maintenance
- IP65 ingress protection
- Robust IK10 impact rating
- 5 year warranty

SPECIFICATION

Colour Temperature CCT	3000K 4000K		
Power	15.4W	21.5W	27.3W
Luminous Flux @4k Opal	2034 lm	2822 lm	3478 lm
Efficacy	132 lm/W	131 lm/W	127 lm/W
Power Factor	0.934	0.962	0.974
Current	500 mA	700 mA	900 mA
CRI	80		
Optic	Opal 114°		
Controls	Fixed Output DALI		
Finish	White Chrome Brass Silver		
Dimensions	Ø380 mm x D 122.5 mm		
Halo Effect	Clear		
Operating Voltage	220-240V 50Hz		
Material	Polycarbonate		
Installation	Surface/Wall		
Emergency Available	Standard DALI		
Ingress Protection	IP65		
Impact Rating	IK10		
Lifetime	50,000hrs		
Operating Temperature	-25°C ~35°C		
Conformity	No UV or IR Emissions, UKCA, UV stabilized		
Warranty	5 Years		

DIMENSIONS

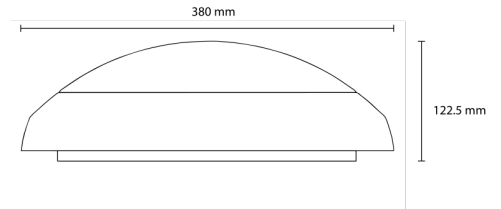

OPTIONS



WHITE



BRASS



CHROME



SILVER


PRODUCT ORDER CODE

EXAMPLE: SUMMIT-S2153OWF380

PREFIX	INSTALLATION	POWER	CCT	OPTIC/DIFFUSER
SUMMIT-	S surface/wall	15 15.4W	3 3000K	O opal
		21 21.5W		
		27 27.3W		

FINISH	DRIVER	DIMENSIONS	EMERGENCY	OPTIONS
W white	F fixed output	380 Ø380 x 122.5	SE standard emergency	HC halo clear
C chrome			DE DALI emergency	
BR brass	D DALI			
S silver				

HALO



HALO - CLEAR