



## SUN 2 - AMENITIY LUMINIARE

The SUN 2 luminaire provides an attractive and durable lighting solutions for various interior applications, such as walkways, corridors, and open office areas.

Featuring a high-performance polycarbonate diffuser, effectively eliminates glare to ensuring excellent photometric performance. Housed within a robust polycarbonate base, each luminaire accommodates a gear tray, electronic driver, and multi-circuit LED board.


### FEATURES

- Efficacy up to 128 lm/W @4000K
- CRI80
- Glow-wire tested
- TP(a) certified
- Surface/wall or suspended installation
- Bracket are available on request to semi recess the module into the wall
- Side entry conduit is available for clean surface mounting
- Indirect component available with halo effect
- Impact modified polycarbonate base and diffuser
- Decorative trims
- UV stabiliser properties
- Compact driver and DALI dimming options
- IP20 ingress protection
- 5 year warranty

## SPECIFICATION

Colour Temperature CCT	3000K   4000K	
Power	29.3W	36.4W
Luminous Flux @4k Opal	3737 lm	4670 lm
Efficacy	128 lm/W	128 lm/W
Power Factor	0.955	0.947
Current	700 mA	900 mA
CRI	80	
Optic	Opal 111°	
Controls	Fixed Output   DALI	
Finish	White   Chrome   Brass	
Dimensions	Ø425 mm x D 111 mm	
Cut Out	Ø395 mm	
Decorative Trims	A-Trim   B-Trim   C-Trim	
Indirect Halo Effect	Clear   Blue   Red   Green	
Operating Voltage	220-240V 50Hz	
Material	Polycarbonate	
Installation	Surface/wall   Suspended   Semi-recessed	
Emergency Available	Standard   DALI	
Ingress Protection	IP20	
Lifetime	50,000hrs	
Operating Temperature	-25°C ~35°C	
Conformity	No UV or IR Emissions, UKCA, UV stabilized	
Warranty	5 Years	

## DIMENSIONS

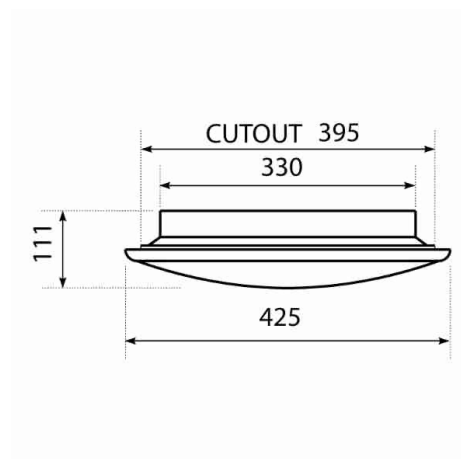

## OPTIONS



WHITE



ANODISED CHROME



ANODISED BRASS



RECESSED - BRACKET



SUSPENDED - WIRE



SURFACE/WALL – SIDE ENTRY

PRODUCT ORDER CODE

EXAMPLE: SUN2-S293OWF425HC

PREFIX	INSTALLATION	POWER	CCT	OPTIC/DIFFUSER
<b>SUN2-</b>	<b>S</b> surface/wall	<b>29</b> 29.3W	<b>3</b> 3000K	<b>O</b> opal
	<b>SS</b> surface/wall side entry	<b>36</b> 36.4W	<b>4</b> 4000K	
	<b>R</b> semi-recessed bracket			
	<b>SP</b> suspended			

FINISH	DRIVER	DIMENSIONS	EMERGENCY	OPTIONS
<b>W</b> white	<b>F</b> fixed output	<b>425</b> Ø425 x 111	<b>SE</b> standard emergency	<b>HC</b> halo clear
<b>C</b> chrome				<b>HC</b> halo blue
<b>BR</b> brass				<b>HC</b> halo red
	<b>D</b> DALI			<b>HC</b> halo green
				<b>T1</b> decorative trim 1
				<b>T2</b> decorative trim 2
				<b>T3</b> decorative trim 3

## HALO & TRIM



HALO - CLEAR



HALO - BLUE



HALO - RED



HALO - GREEN



TRIM - 1



TRIM - 2



TRIM - 3