



SUN – AMENTIY LUMINIARE

The SUN luminaires provide attractive and durable lighting solutions for various interior applications, such as walkways, corridors, and open office areas.

Featuring a high-performance polycarbonate diffuser, effectively eliminates glare to ensuring excellent photometric performance. Housed within a robust aluminium structure, each luminaire accommodates a gear tray, electronic driver, and multi-circuit LED board. Available in a range of finishes and sizes to suit specific application requirements.


FEATURES

- Efficacy up to 128 lm/W @4000K
- CRI80
- Glow-wire tested
- TP(a) certified
- Surface/wall installation
- Bracket are available on request to semi recess the module into the wall
- Impact modified polycarbonate diffuser
- Aluminium base
- UV stabiliser properties
- Compact driver and DALI dimming options
- Springs included for diffuser fitting
- IP20 ingress protection
- 5 year warranty

SPECIFICATION

Colour Temperature CCT	3000K 4000K		
Power	20W	29.3W	36.4W
Luminous Flux @4k Opal	2491 lm	3737 lm	4670 lm
Efficacy	128 lm/W	128 lm/W	128 lm/W
Power Factor	0.94	0.955	0.947
Current	300 mA	700 mA	900 mA
CRI	80		
Optic	Opal 111°		
Controls	Fixed Output DALI		
Finish	White Chrome Brass		
Dimensions - Small	Ø325 mm x D 96 mm		
Dimensions - Medium	Ø425 mm x D 116 mm		
Dimensions - Large	Ø525 mm x D 121 mm		
Operating Voltage	220-240V 50Hz		
Material	Aluminium/Polycarbonate		
Installation	Surface/wall Semi-recessed		
Emergency Available	Standard DALI (not available for Ø325 mm)		
Ingress Protection	IP20		
Lifetime	50,000hrs		
Operating Temperature	-25°C ~35°C		
Conformity	No UV or IR Emissions, UKCA, UV stabilized		
Warranty	5 Years		

DIMENSIONS

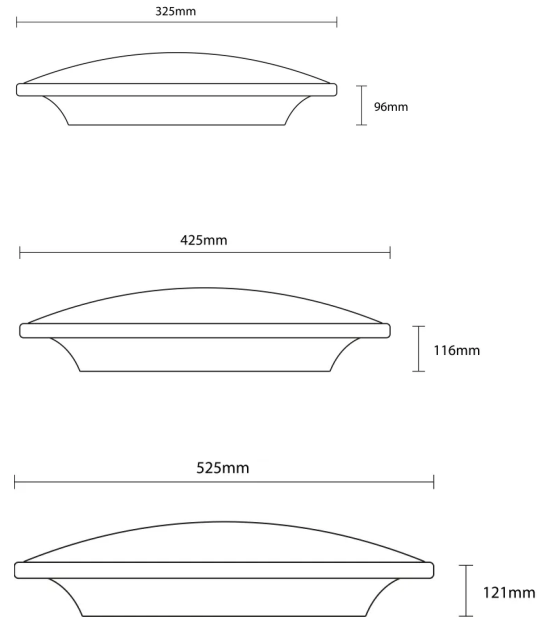

OPTIONS



WHITE



ANODISED CHROME



ANODISED BRASS

PRODUCT ORDER CODE

EXAMPLE: SUN-S294OWF325

PREFIX	INSTALLATION	POWER	CCT	OPTIC/DIFFUSER
SUN-	S surface/wall	29 29.3W	3 3000K	O opal
	R semi-recessed bracket	36 36.4W	4 4000K	

FINISH	DRIVER	DIMENSIONS	EMERGENCY	OPTIONS
W white	F fixed output	325 Ø325 x 96	SE standard emergency	
C chrome		425 Ø425 x 116	DE DALI emergency	
BR brass	525 Ø525 x 121			