




## MEYER – PANEL LUMINAIRE

The MEYER is a slimline panel luminaire that is developed to offer maximum flexibility with a focus on low glare. The backlit design, wireless connectivity and emergency options make the MEYER a perfect luminaire for office, commercial and educational applications.

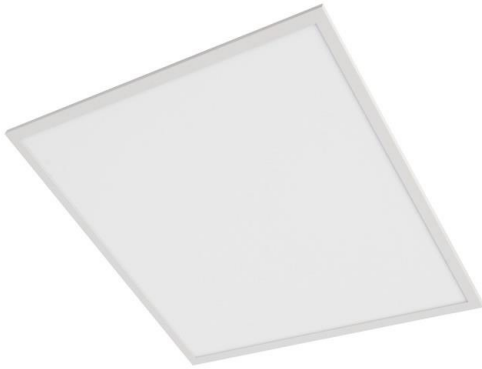


### FEATURES

- 595x595 mm
- Recessed installation
- 3000K and 4000K
- Efficacy up to 153 lm/W
- Optimal low-glare technology
- CRI80
- UGR <19 and TP(a) options
- Robust aluminium material
- Emergency available
- Compact driver
- DALI dimming options
- Plug-and-play wiring for quick installation
- Robust IP40 ingress protection
- IK02 impact rating
- 5 year warranty


## SPECIFICATION

Colour Temperature CCT	3000K   4000K
Power	18   21   23   25   28 W
Luminous Flux @4000K	2750   3130   3470   3800   4180 lm
Efficacy @4000K	153   149   151   152   149 lm/W
CRI	80
Controls	Fixed Output   DALI   Casambi
Beam Angle	90°
UGR	<19
Finish	White RAL9016
Diffuser	Micro-prismatic
Dimensions	L 595 mm x W 595 mm x H 33 mm
Material	Aluminium
Installation	Recessed
Ingress Protection	IP40
Impact Rating	IK02
Weight	1.8 kg
Lifetime	50,000hrs L80B10
Operating Temperature	-0°C ~35°C
Conformity	No UV or IR Emissions, UKCA, IEC II, RoHS
Warranty	5 Years

## DIMENSIONS

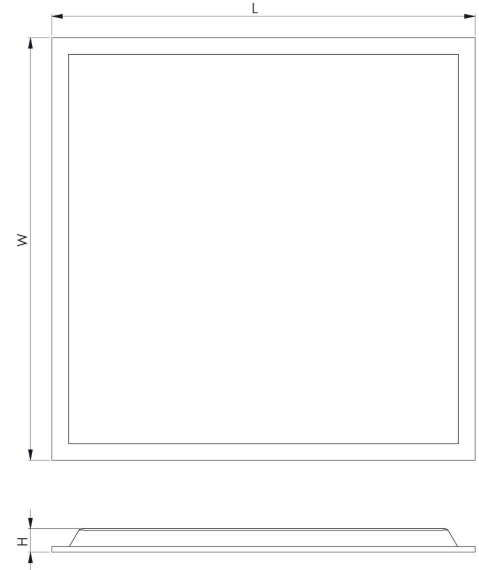

## PHOTOMETRY

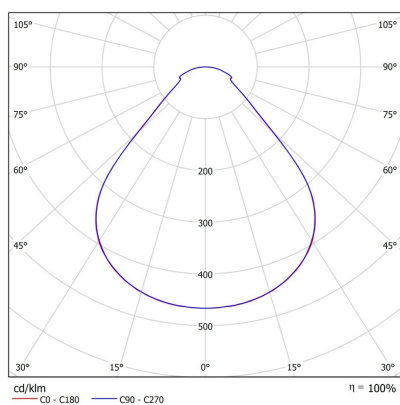

PRODUCT ORDER CODE

EXAMPLE: MEYER-R183FSE

PREFIX	INSTALLATION	POWER	CCT	FINISH	DRIVER	EMERGENCY
<b>MEYER-</b>	<b>R</b> recessed	<b>18</b> 18W	<b>3</b> 3000K	<b>W</b> white	<b>F</b> fixed output	<b>SE</b> standard emergency
	<b>S</b> surface	<b>21</b> 21W	<b>4</b> 4000K		<b>D</b> DALI	<b>DE</b> DALI emergency
		<b>23</b> 23W			<b>C</b> casambi	
		<b>25</b> 25W				
		<b>28</b> 28W				

STANDARD SIZES – POWER – OUTPUT

LENGTH	INSTALLATION	POWER	CCT	CRI	LUMENS - lm	EFFICACY - lm/W	WEIGHT
595 X 595 X 33 mm	Recessed	18W	3000K	80	2660	148	1.8
595 X 595 X 33 mm	Recessed	21W	3000K	80	3030	144	1.8
595 X 595 X 33 mm	Recessed	23W	3000K	80	3350	146	1.8
595 X 595 X 33 mm	Recessed	25W	3000K	80	3670	147	1.8
595 X 595 X 33 mm	Recessed	28W	3000K	80	4030	144	1.8
595 X 595 X 33 mm	Recessed	18W	4000K	80	2750	153	1.8
595 X 595 X 33 mm	Recessed	21W	4000K	80	3130	149	1.8
595 X 595 X 33 mm	Recessed	23W	4000K	80	3470	151	1.8
595 X 595 X 33 mm	Recessed	25W	4000K	80	3800	152	1.8
595 X 595 X 33 mm	Recessed	28W	4000K	80	4180	149	1.8