



ASHA – SURFACE DOWNLIGHT



The ASHA is a surface-mounted compact downlight that delivers exceptional performance. It features an innovative deep glare control reflector design and a height of 180mm, making it ideal for modern interior applications. The downlight is constructed from a die-cast aluminium frame and heatsink, coated with high-performance epoxy-polyester lacquer, ensuring resistance to UV rays and corrosion. Additionally, it includes a technical plastic reflector with very high reflectivity, enhancing its lighting efficiency.




FEATURES

- Ø198 mm
- Surface installation
- 3000K and 4000K
- Efficacy up to 145 lm/W
- Low-glare reflector
- CRI80+
- Robust aluminium material
- Finished in white as standard
- Custom RAL colours on request
- Compact driver, DALI and emergency options
- Quick installation
- IP20 ingress protection
- 5 year warranty


SPECIFICATION

Colour Temperature CCT	4000K
Power	19W
Luminous Flux	2718 lm
Efficacy	Up to 145 lm/W
CRI	80+
Controls	Fixed Output DALI Casambi
Beam Angle	99°
MacAdam Ellipse	3
UGR	19
Finish	White
Dimensions	Ø198 mm x H 180 mm
Operating Voltage	220-240V 50-60 Hz
Material	Aluminium
Installation	Surface
Ingress Protection	IP20
Lifetime	60,000 hrs L80 B10
Operating Temperature	-20°C ~40°C
Weight	1 kg
Conformity	No UV or IR Emissions, UKCA, Protection Class IEC I, RoHS
Warranty	5 Years

DIMENSIONS

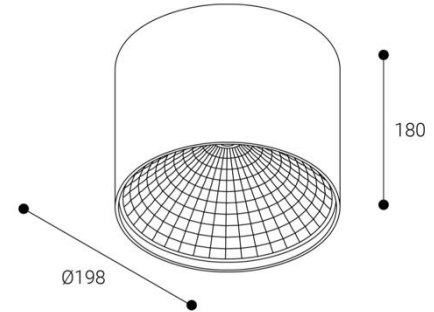

PHOTOMETRY

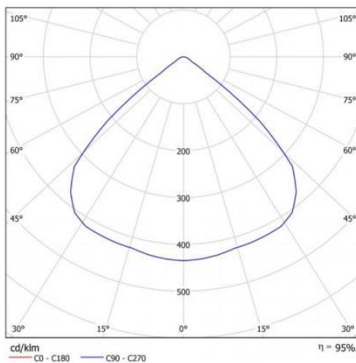

PRODUCT ORDER CODE

EXAMPLE: ASHA-S194FW

PREFIX	INSTALLATION	POWER/LUMENS	CCT	DRIVER	FINISH
ASHA-	S surface	19 19 W	4 4000K	F fixed output D DALI	W white RAL9010