



## BAR – DECORATIVE COLUMN

BAR is a light column designed for architectural spaces with functional low glare light output. It is generally installed in walkways, parks, commercial areas and open spaces to illuminate the areas and give direction to people.

High power COB LED generates an even symmetrical downward light distribution and emits no upward light in accordance with light pollution regulation.

### FEATURES


- Height 4000 mm
- 3000K
- Optimal low-glare - CRI80
- Asymmetric light distributions
- Glare free light
- Available in six colours
- Coated with Nano Ceramic film and super durable polyester powder
- Impact resistant welded aluminium
- Tempered glass and silicon gaskets
- Plug-and-play wiring for quick installation
- Anchor bolt available
- IP66 ingress protection
- IK10 impact rating
- 5 year warranty




## SPECIFICATION

Colour Temperature CCT	3000K
Power	57W
Luminous Flux	2650 lm
Efficacy	Up to 46 lm/W
CRI	80
Controls	Fixed Output
MacAdam Ellipse	3
Dimensions	W 150 x H 4000 mm
Operating Voltage	220-240Vac 50/60Hz
Material	Aluminium Module/Tempered Glass
Finish	Black   Graphite   Aluminium   White   Dark Grey   Wooden Brown
Installation	Surface/Anchor Bolt Available
Ingress Protection	IP66
Impact Rating	IK10
Lifetime	60,000hrs L70 B10
Weight	30 kg
Operating Temperature	-40°C~80°C
Conformity	No UV or IR Emissions, UKCA, Class I, RoHS
Warranty	5 Years

## DIMENSIONS

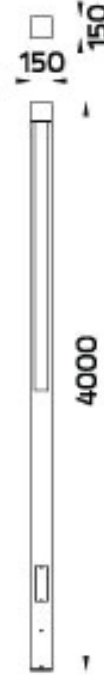

## PHOTOMETRY

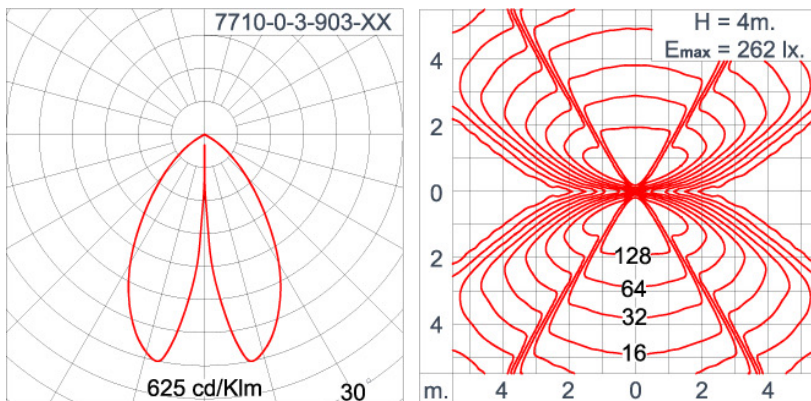

PRODUCT ORDER CODE

EXAMPLE: BAR-S573BF

PREFIX	INSTALLATION	POWER	CCT	FINISH	DRIVER
<b>BAR -</b>	<b>S</b> Surface/column	<b>57</b> 57W	<b>3</b> 3000K	<b>B</b> black  <b>G</b> graphite  <b>DG</b> dark grey  <b>A</b> aluminium silver  <b>W</b> white  <b>B</b> wood brown	<b>F</b> fixed output

